


Product Features

- 18 output buffer for high clock fanout applications
- Each output can be disabled through SMBUS for reductions of EMI/power consumption
- 3.3 volts operation
- Output frequency range 10 Mhz to 100 MHz
- < 250ps skew between output clocks
- 48-pin SSOP package
- Single Clock Enable pin for testability

Product Description

The B9688 is a high fanout system clock buffer. Loads of up to 30 pF are supported. One of the chief applications of this component is where long traces are used to transport clocks from their generating devices to their loads. The creation of EMI and the degradation of waveform rise and fall times are greatly reduced by running a single reference clock trace to this device and then using it to regenerate the clock that drives shorter traces. Using these devices, the EMI is therefore minimized, and board real estate is saved.

Block Diagram

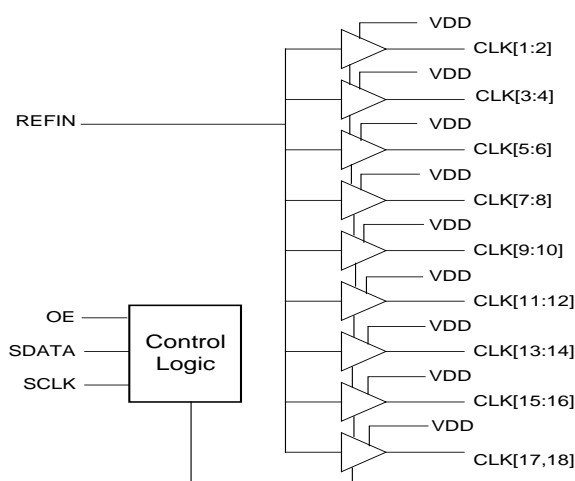

Pin Configuration

IMIB9688			
NC	1	48	NC
NC	2	47	NC
VDD	3	46	VDD
CLK1	4	45	CLK18
CLK2	5	44	CLK17
VSS	6	43	VSS
VDD	7	42	VDD
CLK3	8	41	CLK16
CLK4	9	40	CLK15
VSS	10	39	VSS
REFIN	11	38	OE
VDD	12	37	VDD
CLK5	13	36	CLK14
CLK6	14	35	CLK13
VSS	15	34	VSS
VDD	16	33	VDD
CLK7	17	32	CLK12
CLK8	18	31	CLK11
VSS	19	30	VSS
VDD	20	29	VDD
CLK9	21	28	CLK10
VSS	22	27	VSS
VDD	23	26	VSS
SDATA	24	25	SCLOCK



Pin Description

PIN No.	Pin Name	PWR	I/O	TYPE	Description
11	REFIN	VDD	I	PAD	This pin is connected to the input reference clock. This clock must be in the range of 10.0 to 100.0 Mhz.
4,5, 8,9,13,14, 17,18,21, 28, 31, 32, 35,36,40, 41,44,45	CLK(1:18)	VDD	O	BUF1	Low skew output clock
38	OE	-	I	PAD	Buffer Output Enable pin. When driven to a logic low level this pin is used to place all output clocks (CLK1: 18) in a tri state condition. This feature facilitates in production board level testing to be easily implemented for the clocks that this device produces. Has internal pull-up resistor.
24	SDATA	-	I/O	PAD	Serial data of SMBUS 2-wire control interface. Has internal pull-up resistor.
25	SDCLK	-	I	PAD	Serial clock of SMBUS 2-wire control interface. Has internal pull-up resistor.
6, 10, 15, 19, 22, 30, 34, 39, 43	Vss		PWR	-	Ground pins for clock output buffers. These pins must be returned to the same potential to reduce output clock skew.
3, 7, 12, 16, 20, 33, 37, 42, 46	Vdd	-	PWR	-	Power for output clock buffers.
23, 29	Vdd	-	PWR	-	Power for core logic.
26, 27	Vss	-	PWR	-	Ground supply pins for internal core logic pins.



2-Wire SMBUS Control Interface

The 2-wire control interface implements a write only slave interface. The device cannot be read back. Sub addressing is not supported, thus all preceding bytes must be sent in order to change one of the control bytes. The 2-wire control interface allows each clock output to be individually enabled or disabled.

During normal data transfer, the SDATA signal only changes when the SDCLK signal is low, and is stable when SDCLK is high. There are two exceptions to this. A high to low transition on SDATA while SDCLK is high is used to indicate the start of a data transfer cycle. A low to high transition on SDATA while SDCLK is high indicates the end of a data transfer cycle. Data is always sent as complete 8-bit bytes, after which an acknowledge is generated. The first byte of a transfer cycle is a 7-bit address with a Read/Write bit as the LSB. Data is transferred MSB first.

The device will respond to writes to 10 bytes (max) of data to address **D2** by generating the acknowledge (low) signal on the SDATA wire following reception of each byte. The device will not respond to any other control interface conditions. Previously set control registers are retained.

Serial Control Registers

NOTE: The Pin# column lists the affected pin number where applicable. The @Pup column gives the state at true power up. Bytes are set to the values shown only on true power up, and not when the PWR_DWN# pin is activated.

Following the acknowledge of the Address Byte (D2), two additional bytes must be sent:

- 1) "**Command Code**" byte, and
- 2) "**Byte Count**" byte.

Although the data (bits) in these two bytes are considered "don't care"; they must be sent and will be acknowledged.

After the Command Code and the Count bytes have been acknowledged, the below described sequence (Byte 0, Byte 1, Byte 2...) will be valid and acknowledged.

Byte 0: Function Select Register (1 = enable, 0 = Stopped, Default = FF)

Bit	@Pup	Pin#	Description
7	1	18	CLK8 (Active = 1, Forced low = 0)
6	1	17	CLK7 (Active = 1, Forced low = 0)
5	1	14	CLK6 (Active = 1, Forced low = 0)
4	1	13	CLK5 (Active = 1, Forced low = 0)
3	1	9	CLK4 (Active = 1, Forced low = 0)
2	1	8	CLK3 (Active = 1, Forced low = 0)
1	1	5	CLK2 (Active = 1, Forced low = 0)
0	1	4	CLK1 (Active = 1, Forced low = 0)



Byte 1: Clock Register (1 = enable, 0 = Stopped, Default = FF)

Bit	@Pup	Pin#	Description
7	1	45	CLK18 (Active = 1, Forced low = 0)
6	1	44	CLK17 (Active = 1, Forced low = 0)
5	1	41	CLK16 (Active = 1, Forced low = 0)
4	1	40	CLK15 (Active = 1, Forced low = 0)
3	1	36	CLK14 (Active = 1, Forced low = 0)
2	1	35	CLK13 (Active = 1, Forced low = 0)
1	1	32	CLK12 (Active = 1, Forced low = 0)
0	1	31	CLK11 (Active = 1, Forced low = 0)

Byte 2: Clock Register (1 = enable, 0 = Stopped, Default = C0)

Bit	@Pup	Pin#	Description
7	1	28	CLK10 (Active = 1, Forced low = 0)
6	1	21	CLK9 (Active = 1, Forced low = 0)
5	0	-	Not Used
4	0	-	Not Used
3	0	-	Not Used
2	0	-	Not Used
1	0	-	Not Used
0	0	-	Not Used

Maximum Ratings

Voltage Relative to VSS:	-0.3V
Voltage Relative to VDD:	0.3V
Storage Temperature:	-65°C to + 150°C
Operating Temperature:	0°C to +70°C
Maximum Power Supply:	7V

This device contains circuitry to protect the inputs against damage due to high static voltages or electric field; however, precautions should be taken to avoid application of any voltage higher than the maximum rated voltages to this circuit. For proper operation, Vin and Vout should be constrained to the range:

$$VSS < (V_{in} \text{ or } V_{out}) < VDD$$

Unused inputs must always be tied to an appropriate logic voltage level (either VSS or VDD).



DC Parameters

Characteristic	Symbol	Min	Typ	Max	Units	Conditions
Input Low Voltage (OE)	VIL	-	-	0.8	Vdc	-
Input High Voltage (OE)	VIH	2.0	-	-	Vdc	-
Input Low Current	IIL	-66		-	μA	
Input High Current	IIH			66	μA	
Input Low Voltage (SMBUS)	VIL _{isc}	-	-	1.0	Vdc	
Input High Voltage (SMBUS)	VIH _{isc}	2.2	-	-	Vdc	
Tri-State leakage Current	I _{oz}	-	-	10	μA	
Dynamic Supply Current	I _{dd66}	9	-	160	mA	Input frequency = 66 MHz - All outputs on and at 30 pF load
Dynamic Supply Current	I _{dd100}	12	-	220	mA	Input frequency 100 MHz - All outputs on and at 30 pF load
Static Supply Current	I _{sdd}	-	-	4	mA	All outputs disabled no input clock
Input pin capacitance	C _{in}	-	-	5	pF	
Pin Inductance	L _{pin}	-	-	7	nH	
Output Capacitance	C _{out}	-	-	6	pF	
VDD = 3.3V ±5%, , TA = 0°C to +70°C						

AC Parameters




Characteristic	Symbol	Min	Typ	Max	Units	Conditions
Output Duty Cycle	-	45	50	55	%	Measured at 1.5V (50/50 in)
Buffer out/out Skew All Buffer Outputs	tSKEW	-	-	250	pS	35 pF Load Measured at 1.5V
Buffer input to output Skew	tDLY	2.0	0	5.0	nS	
Jitter Cycle to Cycle*	TJCC			100	pS	@ 30 pF loading
Jitter Absolute (Peak to Peak)*	TJabs			150	pS	@ 30 pF loading
VDD = 3.3V ±5%, , TA = 0°C to +70°C						


*This jitter is additive to the input clock's jitter.

**Buffer Characteristics (All Clock Outputs)**

Characteristic	Symbol	Min	Typ	Max	Units	Conditions
Pull-Up Current Min	IOH_{min}	30	-	39	mA	$V_{out} = V_{DD} - 0.5V$
Pull-Up Current Max	IOH_{max}	75	-	109	mA	$V_{out} = 1.5V$
Pull-Down Current Min	IOL_{min}	30	-	40	mA	$V_{out} = 0.4 V$
Pull-Down Current Max	IOL_{max}	75	-	103	mA	$V_{out} = 1.2V$
Dynamic Output Impedance	Z_O	8	-	15	Ohms	66 - 100 MHz
Rise/Fall Time Min Between 0.4 V and 2.4 V	TRF_{min}	0.5	-	1.33	nS	30 pF Load
Rise/Fall Time Max Between 0.4 V and 2.4 V	TRF_{max}	0.5	-	1.33	nS	30 pF Load
$V_{DD} = 3.3V \pm 5\%$, , $TA = 0^{\circ}C$ to $+70^{\circ}C$						


PCB Layout Suggestion

-  Via to VDD Plane
-  Via to GND Plane
-  Void (cut) in power plane

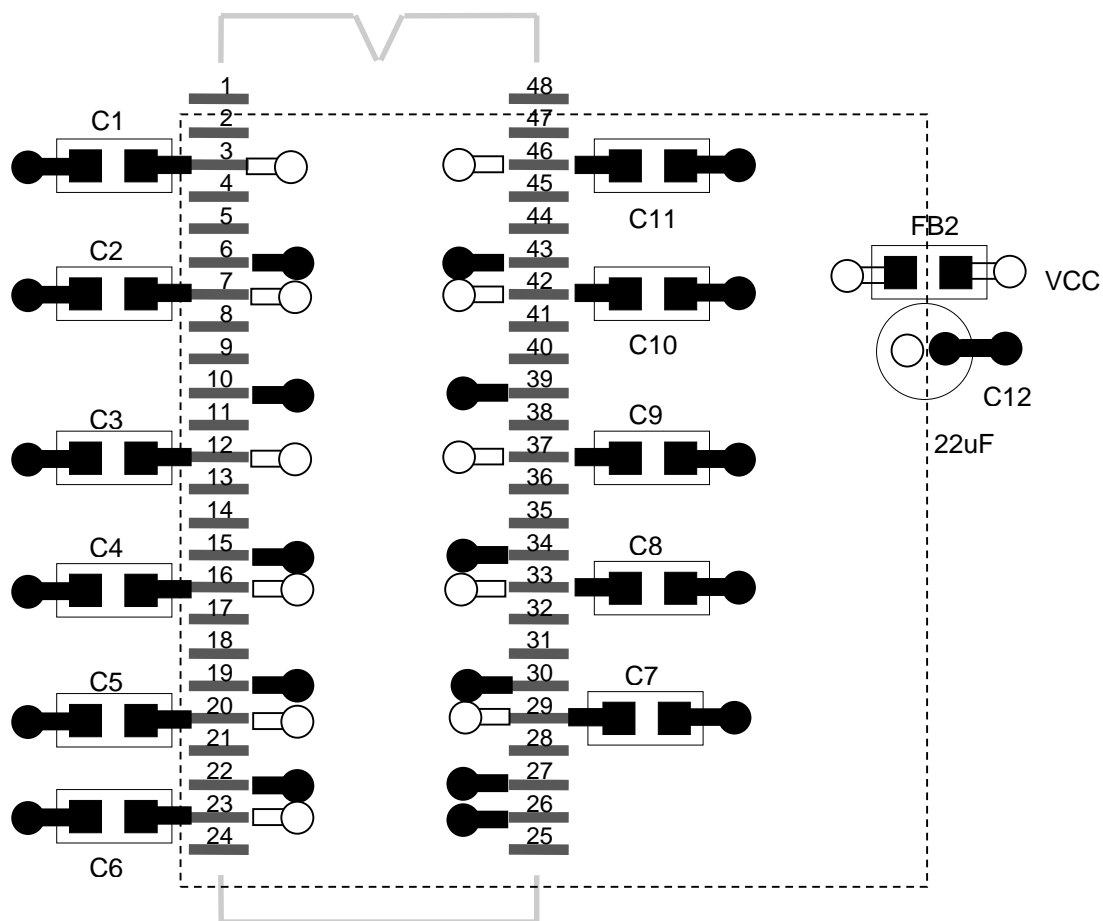

This is only a layout recommendation for best performance and lower EMI. The designer may choose a different approach but C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, and C11 (all are 0.1 μ f) should always be used and placed as close to their VDD pins as is physically possible.

Package Drawing and Dimensions

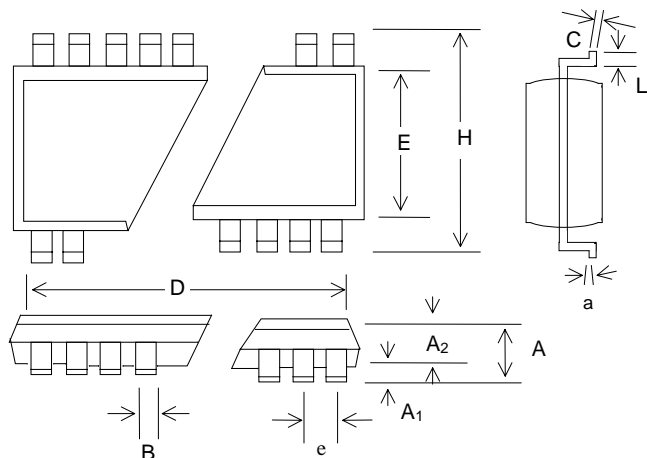

48 Pin SSOP Outline Dimensions


SYMBOL	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.095	0.102	0.110	2.41	2.59	2.79
A ₁	0.008	0.012	0.016	0.20	0.31	0.41
A ₂	0.085	0.090	0.095	2.16	2.29	2.41
B	0.008	0.010	0.0135	0.203	0.254	0.343
c	0.005	.008	0.010	0.127	0.20	0.254
D	0.620	0.625	0.637	15.75	15.88	16.18
E	0.291	0.295	0.299	7.39	7.49	7.59
e	0.0256 BSC			0.640 BSC		
H	0.395	0.408	0.420	10.03	10.36	10.67
L	0.024	0.030	0.040	0.61	0.76	1.02
a	0°	4°	8°	0°	4°	8°

Ordering Information

Part Number	Package Type	Production Flow
B9688AYB	48 PIN SSOP	Commercial, 0°C to +70°C

Note: The ordering part number is formed by a combination of device number, device revision, package style, and screening as shown below.

Marking: Example: Cypress
B9688AYB
Date Code, Lot #

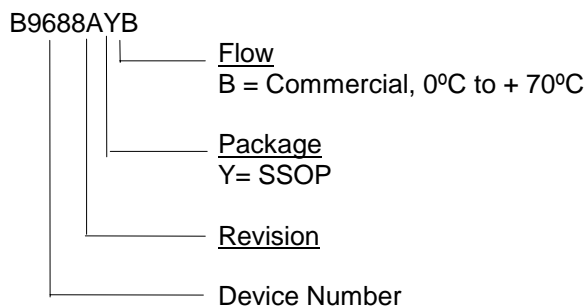



APPROVED PRODUCT

B9688

SMBUS System Clock Buffer

Notice

Cypress Semiconductor Corporation reserves the right to make changes to its products in order to improve design, performance or reliability. Cypress Semiconductor Corporation assumes no responsibility for the use of its products in life supporting and medical applications where the failure or malfunction of the product could cause failure of the life supporting and medical systems. Products are not authorized for use in such applications unless a written approval is requested by the manufacturer and an approval is given in writing by Cypress Semiconductor Corporation for the use of its products in the life supporting and medical applications.



APPROVED PRODUCT

B9688

SMBUS System Clock Buffer

Document Title: B9688 SMBus System Clock Buffer				
Document Number: 38-07075				
Rev.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	107111	06/05/01	IKA	Convert from IMI to Cypress