

### Product Features

- 160MHz Clock Support
- LVCMOS/LVTTL Compatible Inputs
- 10 Clock Outputs: Drive up to 20 Clock Lines
- 1X or 1/2X Configurable Outputs
- Output Tri-state Control
- 250ps Maximum Output-to-Output Skew
- Pin Compatible with MPC946
- Industrial Temp. Range: -40°C to +85°C
- 32-Pin TQFP Package

### Block Diagram

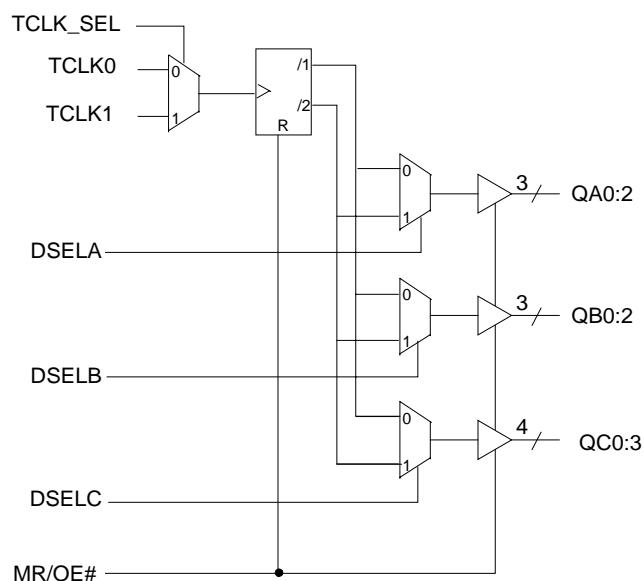


Figure 1


### Description

The B9946 is a low voltage clock distribution buffer with the capability to select one of two LVCMOS/LVTTL compatible input clocks. These clock sources can be used to provide for test clocks as well as the primary system clocks. All other control inputs are LVCMOS/LVTTL compatible. The 10 outputs are 3.3V LVCMOS or LVTTL compatible and can drive two series terminated 50Ω transmission lines. With this capability the B9946 has an effective fan-out of 1:20.

The B9946 is capable of generating 1X and 1/2X signals from a 1X source. These signals are generated and retimed internally to ensure minimal skew between the 1X and 1/2X signals. SEL(A:C) inputs allow flexibility in selecting the ratio of 1X to 1/2X outputs.

The B9946 outputs can also be tri-stated via MR/OE# input. When MR/OE# is set high, it resets the internal flip-flops and tri-states the outputs.

### Pin Configuration

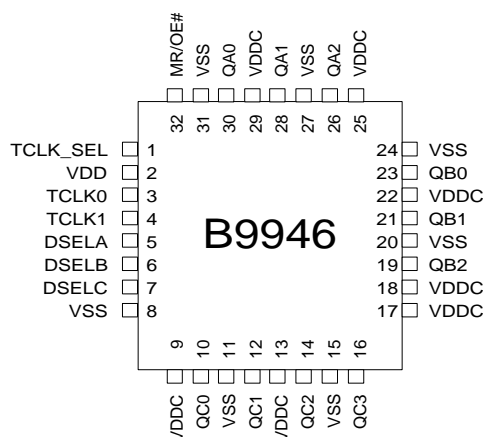

**B9946****3.3V, 160MHz, 1:10 Clock Distribution Buffer****Pin Description**

PIN	NAME	PWR	I/O	Description
3, 4	<b>TCLK(0,1)</b>		I, PU	External Reference/Test Clock Input.
26, 28, 30	<b>QA(2:0)</b>	VDDC	O	Clock Outputs.
19, 21, 23	<b>QB(2:0)</b>	VDDC	O	Clock Outputs.
10, 12, 14, 16	<b>QC(0:3)</b>	VDDC	O	Clock Outputs.
5, 6, 7	<b>DSEL(A:C)</b>		I, PD	Divider Select Inputs. When high, selects ÷2 input divider. When low, selects ÷1 input divider.
1	<b>TCLK_SEL</b>		I, PD	TCLK Select Input. When low, TCLK0 clock is selected and when high TCLK1 is selected.
32	<b>MR/OE#</b>		I, PD	Output Enable Input. When asserted low, the outputs are enabled and when asserted high, internal flip-flops are reset and the outputs are tri-stated.
9, 13, 17, 18, 22, 25, 29	<b>VDDC</b>			3.3V Power Supply for Output Clock Buffers.
2	<b>VDD</b>			3.3V Power Supply
8, 11, 15, 20, 24, 27, 31	<b>VSS</b>			Common Ground

PD = Internal Pull-Down, PU = Internal Pull-Up.

## 3.3V, 160MHz, 1:10 Clock Distribution Buffer

### Maximum Ratings

Maximum Input Voltage Relative to VSS: VSS - 0.3V  
 Maximum Input Voltage Relative to VDD: VDD + 0.3V  
 Storage Temperature: -65°C to +150°C  
 Operating Temperature: -40°C to +85°C  
 Maximum ESD protection 2KV  
 Maximum Power Supply: 5.5V  
 Maximum Input Current: ±20mA

This device contains circuitry to protect the inputs against damage due to high static voltages or electric field; however, precautions should be taken to avoid application of any voltage higher than the maximum rated voltages to this circuit. For proper operation, Vin and Vout should be constrained to the range:

$$VSS < (V_{in} \text{ or } V_{out}) < VDD$$

Unused inputs must always be tied to an appropriate logic voltage level (either VSS or VDD).

### DC Parameters

Characteristic	Symbol	Min	Typ	Max	Units	Conditions
Input Low Voltage	VIL	VSS		0.8	V	
Input High Voltage	VIH	2.0		VDD	V	
Input Low Current (@VIL = VSS)	IIL			-100	μA	Note 1
Input High Current (@VIL = VDD)	IIH			100	μA	
Output Low Voltage	VOL			0.4	V	IOL = 20mA, Note 2
Output High Voltage	VOH	2.5			V	IOH = -20mA, VDDC = 3.3V Note 2
Quiescent Supply Current	IDD	-	1	2	mA	All VDDC and VDD
Input Capacitance	Cin	-	-	4	pF	
VDDC = 3.3V ±10%, VDD = 3.3V ±10%, TA = -40°C to +85°C						

**Note 1:** Inputs have pull-up/pull-down resistors that effect input current.

**Note 2:** Driving series or parallel terminated 50Ω (or 50Ω to VDD/2) transmission lines.

### AC Parameters<sup>1</sup>

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Fmax	Maximum Input Frequency <sup>2</sup>	160			MHz	
Tpd	TTL_CLK to Q Delay <sup>2</sup>	5.0	-	11.5	ns	
FoutDC	Output Duty Cycle <sup>2,3</sup>	TCYCLE/2 - 1		TCYCLE/2 + 1	ns	Measured at VDDC/2
tpZL, tpZH	Output enable time (all outputs)	2		10	ns	
tpLZ, tpHZ	Output disable time (all outputs)	2		10	ns	
Tskew	Output-to-Output Skew <sup>2,4</sup>			250	ps	
Tskew(pp)	Part-to-Part Skew <sup>5</sup>		2.0	4.5	ns	
Tr / Tf	Output Clocks Rise / Fall Time <sup>4</sup>	0.10		1.0	ns	0.8V to 2.0V
VDDC = 3.3V ±10%, VDD = 3.3V ±10%, TA = -40°C to +85°C						

**Note 1:** Parameters are guaranteed by design and characterization. Not 100% tested in production. All parameters specified with loaded outputs.


**Note 2:** Outputs driving 50Ω transmission lines.

**Note 3:** 50% input duty cycle.

**Note 4:** Outputs loaded with 30pF each

**Note 5:** Part-to-Part skew at a given temperature and voltage

### Package Drawing and Dimensions

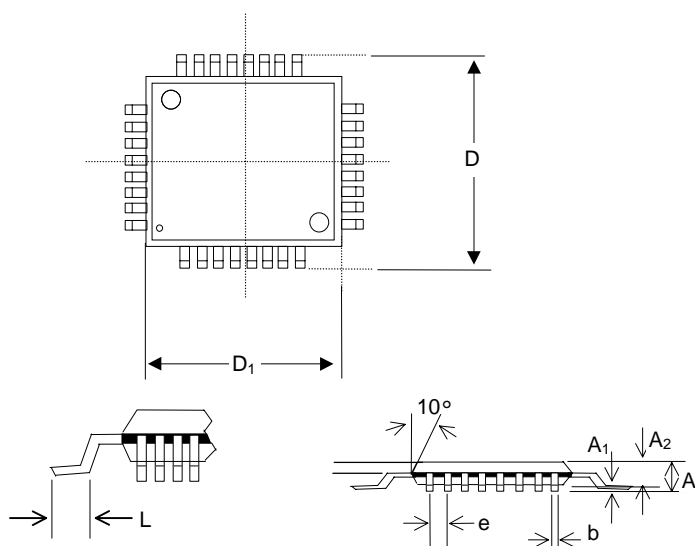

### 32 Pin TQFP Outline Dimensions

SYMBOL	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	-	-	0.047	-	-	1.20
A <sub>1</sub>	0.002	-	0.006	0.05	-	0.15
A <sub>2</sub>	0.037	-	0.041	0.95	-	1.05
D	-	0.354	-	-	9.00	-
D <sub>1</sub>	-	0.276	-	-	7.00	-
b	0.012	-	0.018	0.30	-	0.45
e	0.031 BSC			0.80 BSC		
L	0.018	-	0.030	0.45	-	0.75

### Ordering Information

Part Number	Package Type	Production Flow
B9946CA	32 PIN TQFP	Industrial, -40°C to +85°C

**Note:** The ordering part number is formed by a combination of device number, device revision, package style, and screening as shown below.

**Marking:** Example: Cypress  
B9946CA  
Date Code, Lot #

B9946CA

Package  
A = TQFP

Revision

Device Number

### Notice

Cypress Semiconductor Corporation reserves the right to make changes to its products in order to improve design, performance or reliability. Cypress Semiconductor Corporation assumes no responsibility for the use of its products in life supporting and medical applications where the failure or malfunction of the product could cause failure of the life supporting and medical systems. Products are not authorized for use in such applications unless a written approval is requested by the manufacturer and an approval is given in writing by Cypress Semiconductor Corporation for the use of its products in the life supporting and medical applications.

**B9946****3.3V, 160MHz, 1:10 Clock Distribution Buffer****Document Title:** B9946 3.3V, 160 MHz, 1:10 Clock Distribution Buffer**Document Number:** 38-07077

Rev.	ECN No.	Issue Date	Orig. of Change	Description of Change
**	107113	06/06/01	IKA	Convert from IMI to Cypress
*A	108057	07/03/01	NDP	Changed Commercial to Industrial (See page 4)