

3V RS562 or 5V/3V RS232
Transceiver with One Re-
ceiver Active in SHUTDOWN

FEATURES

- **RS232 Compatible 3V Operation**
- **3V Logic Interface**
- **ESD Protection Over $\pm 10\text{kV}$**
- One Low Power Receiver Remains Active While in SHUTDOWN
- $60\mu\text{A}$ Supply Current in SHUTDOWN
- Low Power DRIVER DISABLE Mode
- Uses Small Capacitors: $0.1\mu\text{F}$, $0.2\mu\text{F}$
- 120kbaud Operation for $R_L = 3\text{k}$, $C_L = 2500\text{pF}$
- 250kbaud Operation for $R_L = 3\text{k}$, $C_L = 1000\text{pF}$
- CMOS Comparable Low Power: 60mW
- Easy PC Layout: Flowthrough Architecture
- Rugged Bipolar Design
- Outputs Assume a High Impedance State When OFF or Powered Down

APPLICATIONS

- Notebook Computers
- Palmtop Computers

DESCRIPTION



The LT1331 is a 3-driver, 5-receiver RS232 transceiver designed for 3V and mixed 3V/5V systems. Receivers operate from 3V logic supply V_L , while the on-board charge pump and drivers operate from 5V or 3V supply V_{CC} .

The transceiver has two SHUTDOWN modes. One mode disables the drivers and the charge pump, the other shuts down all circuitry except for one low power receiver which can be used for ring detection. The V_{CC} supply may be shut down while in ring detection mode. While shut down, the drivers and receivers assume high impedance output states.

The LT1331 is fully compliant with all EIA-RS232 specifications when $V_{CC} = 5V$. If $V_{CC} = 3V$, output drive levels are compatible with all known interface circuits. Special bipolar construction techniques protect the drivers and receivers beyond the fault conditions stipulated for RS232. The RS232 I/O pins are resilient to multiple $\pm 10kV$ ESD strikes. An advanced driver output stage operates up to 120k baud while driving heavy capacitive loads.

TYPICAL APPLICATION


3.3V Operation

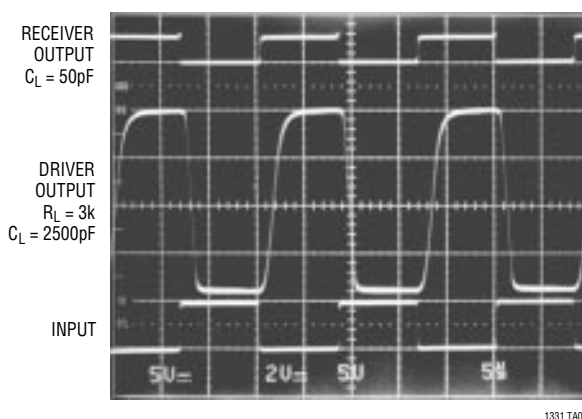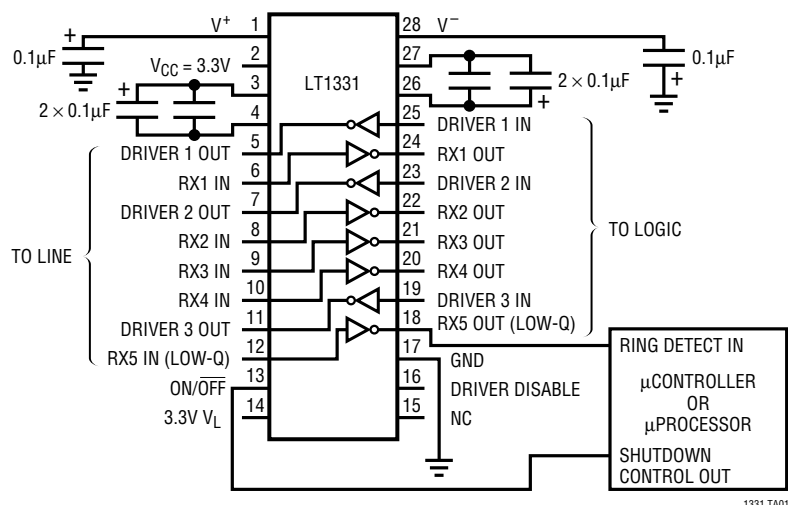

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V_{CC})	6V
Supply Voltage (V_L)	6V
V^+	13.2V
V^-	-13.2V
Input Voltage	
Driver	V^+ to V^-
Receiver	30V to -30V
ON/OFF	-0.3V to $V_{CC} + 0.3V$
DRIVER DISABLE	-0.3V to $V_{CC} + 0.3V$
Output Voltage	
Driver	-30V to 30V
Receiver	-0.3V to $V_L + 0.3V$
Short Circuit Duration	
V^+	30 sec
V^-	30 sec
Driver Output	Indefinite
Receiver Output	Indefinite
Operating Temperature Range	
LT1331C	0°C to 70°C
Storage Temperature Range	
	-65°C to 150°C
Lead Temperature (Soldering, 10 sec)	
	300°C

PACKAGE/ORDER INFORMATION

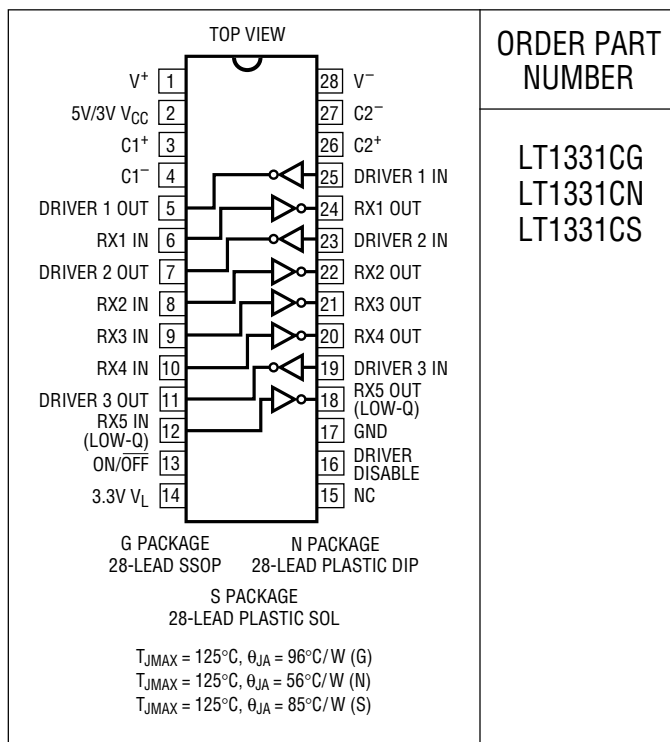ORDER PART
NUMBERLT1331CG
LT1331CN
LT1331CS

Consult factory for Industrial and Military grade parts.

ELECTRICAL CHARACTERISTICS (Note 1)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Power Supply Generator					
V^+ Output	$V_{CC} = 5V$		8.6		V
	$V_{CC} = 3.3V$		5.5		V
V^- Output	$V_{CC} = 5V$		-7.0		V
	$V_{CC} = 3.3V$		-4.8		V
Supply Current (V_{CC})	$V_{CC} = 5V$ (Note 2)	●	12	17	mA
	$V_{CC} = 3.3V$	●	12	17	mA
Supply Current (V_L)	(Note 3)	●	3	5	mA
	SHUTDOWN (Note 4)	●	2	50	μA
Supply Current When OFF (V_{CC})	DRIVER DISABLE		0.1	1	mA
	SHUTDOWN (Note 4)	●	60	100	μA
Supply Current When OFF (V_L)	DRIVER DISABLE		3	5	mA
	SHUTDOWN (Note 4)	●	3	5	mA
Supply Rise Time, SHUTDOWN to Turn-On	$C1 = C2 = 0.2\mu F, C^+ = C^- = 0.1\mu F$		0.2		ms
ON/OFF Pin Thresholds	Input Low Level (Device SHUTDOWN)	●	1.4	0.8	V
	Input High Level (Device Enabled)	●	2.4	1.4	V
ON/OFF Pin Current	$0V \leq V_{ON/OFF} \leq 5V$	●	-15	80	μA
DRIVER DISABLE Pin Thresholds	Input Low Level (Drivers Enabled)	●	1.4	0.8	V
	Input High Level (Drivers Disabled)	●	2.4	1.4	V
DRIVER DISABLE Pin Current	$0V \leq V_{DRIVER\ DISABLE} \leq 5V$	●	-10	500	μA
Oscillator Frequency			130		kHz

ELECTRICAL CHARACTERISTICS

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Any Driver						
Output Voltage Swing, Positive	$V_{CC} = 5V, R_L = 3k$ $V_{CC} = 3.3V, R_L = 3k$	●	5.0 3.7	6.5 4.0		V V
Output Voltage Swing, Negative	$V_{CC} = 5V, R_L = 3k$ $V_{CC} = 3.3V, R_L = 3k$	●		-6.0 -3.3	-5.0 -2.7	V V
Logic Input Voltage Level	Input Low Level ($V_{OUT} = \text{High}$) Input High Level ($V_{OUT} = \text{Low}$)	● ●	2.0	1.4 1.4	0.8	V V
Logic Input Current	$0.8V \leq V_{IN} \leq 2V$	●		5	20	μA
Output Short-Circuit Current	$V_{OUT} = 0V$		± 9	17		mA
Output Leakage Current	SHUTDOWN $V_{OUT} = \pm 30V$ (Note 4)	●		10	100	μA
Data Rate	$R_L = 3k, C_L = 2500pF$ $R_L = 3k, C_L = 1000pF$		120 250			kBaud kBaud
Slew Rate	$R_L = 3k, C_L = 51pF$ $R_L = 3k, C_L = 2500pF$			15 6	30	V/ μs V/ μs
Propagation Delay	Output Transition t_{HL} High to Low (Note 5) Output Transition t_{LH} Low to High			0.6 0.5	1.3 1.3	μs μs
Any Receiver						
Input Voltage Thresholds	Input Low Threshold ($V_{OUT} = \text{High}$) Input High Threshold ($V_{OUT} = \text{Low}$)	● ●	0.8	1.3 1.7		V V
Hysteresis		●	0.1	0.4	1.0	V
Input Resistance	$V_{IN} = \pm 10V$		3	5	7	k Ω
Receivers 1 Through 4						
Output Voltage	Output Low, $I_{OUT} = -1.6mA$ Output High, $I_{OUT} = 160\mu A$ ($V_L = 3.3V$)	● ●		0.2 2.4	0.4	V V
Output Short-Circuit Current	Sinking Current, $V_{OUT} = V_{CC}$ Sourcing Current, $V_{OUT} = 0V$		10	-20 20	-10	mA mA
Propagation Delay	Output Transition t_{HL} High to Low (Note 6) Output Transition t_{LH} Low to High			250 350	600 600	ns ns
Output Leakage Current	SHUTDOWN (Note 4) $0 \leq V_{OUT} \leq V_{CC}$	●		1	10	μA
Receiver 5 (Low Q-Current RX)						
Output Voltage	Output Low, $I_{OUT} = -500\mu A$ Output High, $I_{OUT} = 160\mu A$ ($V_L = 3V$)	● ●	2.0	0.2 2.4	0.4	V V
Output Short-Circuit Current	Sinking Current, $V_{OUT} = V_{CC}$ Sourcing Current, $V_{OUT} = 0V$		2	-4 4	-2	mA mA
Propagation Delay	Output Transition t_{HL} High to Low (Note 6) Output Transition t_{LH} Low to High			1 1	3 3	μs μs

The ● denotes specifications which apply over the full operating temperature range ($0^\circ C \leq T_A \leq 70^\circ C$ for commercial grade).

Note 1: Testing done at $V_{CC} = 5V$, $V_L = 3.3V$, and $V_{ON/OFF} = 3V$, unless otherwise stated.

Note 2: Supply current is measured as the average over several charge pump cycles. $C^+ = 1\mu F$, $C^- = 0.1\mu F$, $C1 = C2 = 0.2\mu F$. All outputs are open with all driver inputs tied high.

Note 3: V_L supply current is measured with all receiver outputs high.


Note 4: Supply current and leakage current measurements in SHUTDOWN are performed with $V_{ON/OFF} \leq 0.1V$. Supply current measurements using DRIVER DISABLE are performed with $V_{DRIVER\ DISABLE} \geq 3V$.

Note 5: For driver delay measurements, $R_L = 3k$ and $C_L = 51pF$. Trigger points are set between the driver's input logic threshold and the output transition to the zero crossing ($t_{HL} = 1.4V$ to $0V$ and $t_{LH} = 1.4V$ to $0V$).


Note 6: For receiver delay measurements, $C_L = 51pF$. Trigger points are set between the receiver's input logic threshold and the output transition to standard TTL/CMOS logic threshold ($t_{HL} = 1.3V$ to $2.0V$ and $t_{LH} = 1.7V$ to $0.8V$).

TYPICAL PERFORMANCE CHARACTERISTICS


Driver Short-Circuit Current

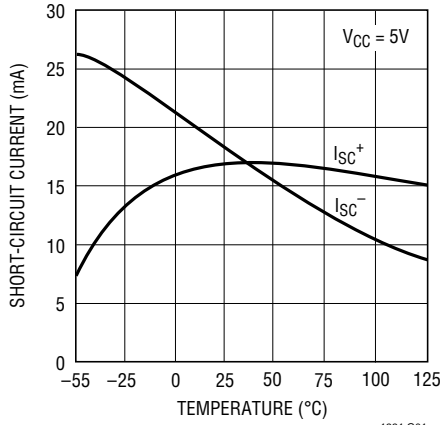


Driver Output Voltage

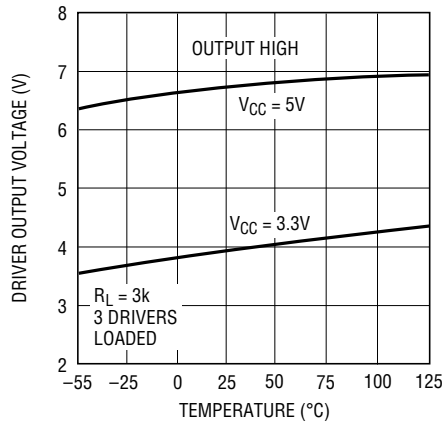


Driver Output Voltage

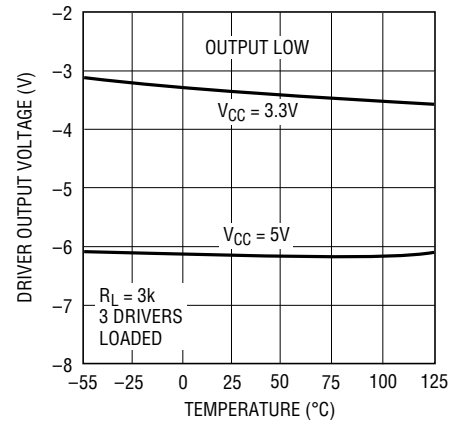


Driver Leakage in SHUTDOWN

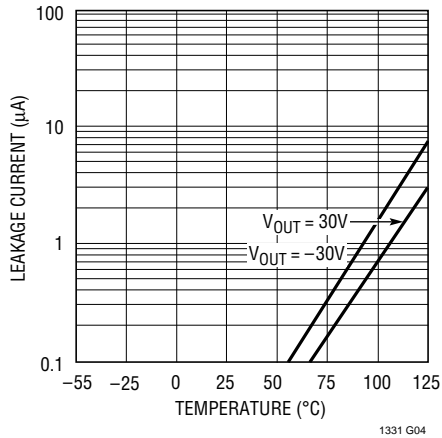


Slew Rate vs Load Capacitance

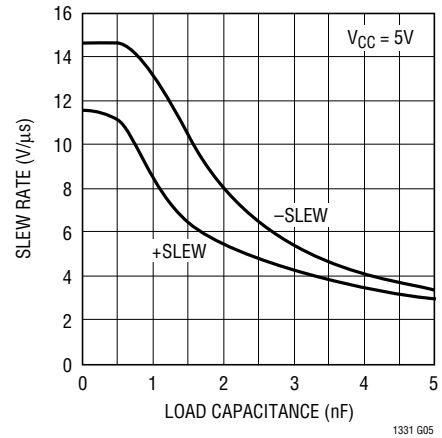


Slew Rate vs Load Capacitance

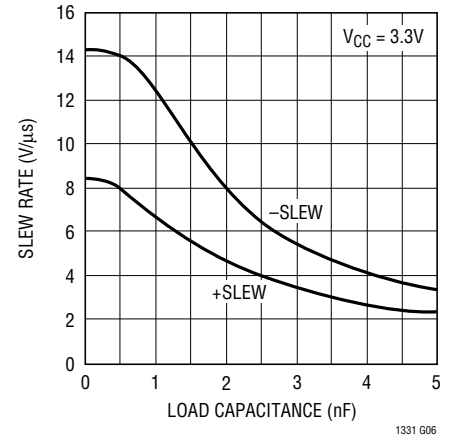


Supply Current vs Data Rate

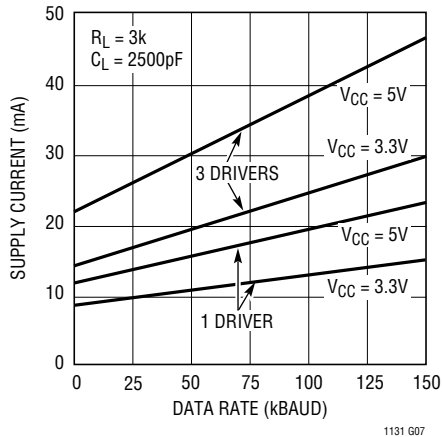

Receiver Input Thresholds

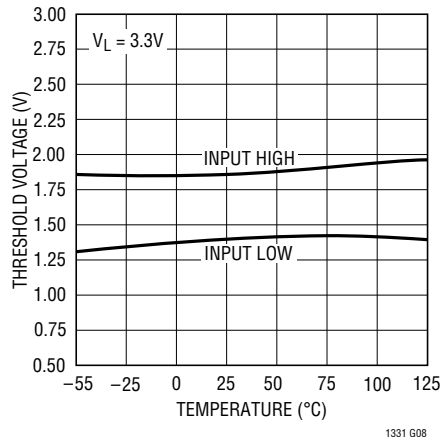

Receiver Short-Circuit Current

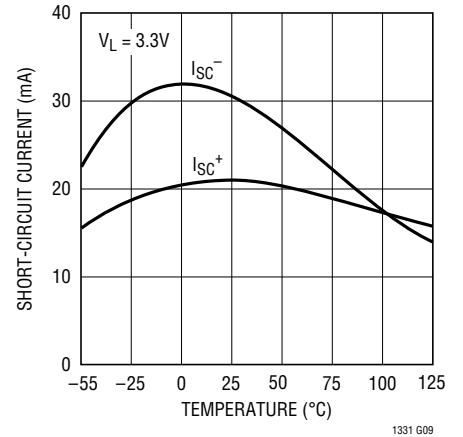

PIN FUNCTIONS

V_{CC}: Power Supply for Charge Pump and Drivers. Proper circuit operation is insured for $V_{CC} = 3V$ to $6V$. $V_{CC} = 5V$ operation gives full RS232 compliant performance, $3V$ operation results in lower driver output amplitude. The V_{CC} pin should be decoupled with a $0.1\mu F$ ceramic capacitor.

V_L: Power Supply for Receivers. This pin should be powered to the same voltage as the logic circuits connected to the receiver outputs, either $5V$ or $3V$. The V_L pin should be decoupled with a $0.1\mu F$ ceramic capacitor.

GND: Ground.

ON/OFF: A TTL/CMOS Compatible Operating Mode Control. A logic low puts the device in the SHUTDOWN mode. All drivers and four of the receivers go to a high impedance state, and the V_{CC} supply may be turned off. A logic high fully enables the transceiver.

DRIVER DISABLE: A logic high shuts down the charge pump, placing all drivers in a high impedance state. All receivers remain active. Floating the pin, or driving it to a logic low, fully enables the transceiver. A low voltage on the ON/OFF pin supersedes the state of the DRIVER DISABLE control.

V⁺: Positive Supply Output. $V^+ \cong 2V_{CC} - 1.5V$. This pin requires an external capacitor for charge storage, chosen to minimize ripple to acceptable levels. A minimum size of $0.1\mu F$ is recommended.

V⁻: Negative Supply Output. $V^- \cong -(2V_{CC} - 2.5V)$. This pin requires an external charge storage capacitor, chosen to minimize ripple on V^- . A minimum value of $0.1\mu F$ is recommended.

C1⁺, C1⁻, C2⁺, C2⁻: These pins require two external capacitors $C \geq 0.2\mu F$. One from C1⁺ to C1⁻, and another from C2⁺ to C2⁻. To maintain charge pump efficiency, the capacitor's effective series resistance should be less than

2Ω . Low ESR tantalum capacitors work well in this application, small value ceramic capacitors may also be used with minimal reduction in charge pump compliance.

DRIVER IN: RS232 Driver Inputs. Inputs are TTL/CMOS compatible. Tie unused inputs to V_{CC} .

DRIVER OUT: RS232 Driver Outputs. Outputs are in a high impedance state when in SHUTDOWN, DRIVER DISABLE, or $V_{CC} = 0V$. Outputs are fully short-circuit protected from $V^- + 30V$ to $V^+ - 30V$. Although the outputs are protected, short circuits on one output can load the power supply generator and may disrupt the signal levels of the other outputs. The driver outputs are protected against ESD to $\pm 10kV$ for human body model discharges. Output levels of $-3.3V$ to $4V$ are achieved when the circuit is operated with $V_{CC} = 3.3V$.

RX IN: Receiver Inputs with $0.4V$ of Hysteresis for Noise Immunity. These pins accept RS232 level signals ($\pm 30V$) into a protected $5k$ terminating resistor. The receiver inputs are protected against ESD to $\pm 10kV$ for human body model discharges.

RX OUT: Receiver Outputs. RX1 through RX4 outputs are in a high impedance state when in SHUTDOWN mode to allow data line sharing. Outputs, including LOW-Q RX OUT, are fully short-circuit protected to ground, V_{CC} , or V_L . Output voltage levels are determined by the choice of power supply V_L .

LOW-Q RX IN: Low Power Receiver Input. This receiver remains active in SHUTDOWN mode, consuming only $60\mu A$ from supply V_L . This receiver has the same input and protection characteristics as receivers RX1 through RX4.

LOW-Q RX OUT: Low Power Receiver Output. This pin produces the same output levels as standard receivers, with slightly decreased speed and short-circuit current.

APPLICATIONS INFORMATION

Power Saving Operational Modes

The LT1331 has both SHUTDOWN and DRIVER DISABLE operating modes. These operating modes can optimize power consumption based upon applications needs.

The SHUTDOWN control turns off all circuitry except for Low-Q RX5. RX5 operates entirely from the V_L power supply, so the power consumption from V_{CC} drops to zero. The V_{CC} power supply may be turned off while in SHUTDOWN, which may allow greater power savings in some systems. When RX5 detects a signal, this information can be used to wake up the system for full operation.

If more than one line must be monitored, the DRIVER DISABLE mode provides a power efficient operating option. The DRIVER DISABLE mode turns off the charge pumps and RS232 drivers, but keeps all five receivers active. Power consumption in DRIVER DISABLE mode is 3mA from V_L and less than 100 μ A from V_{CC} .

Mixed 5V/3V Operation

When operated with $V_{CC} = 5V$ and $V_L = 3.3V$ supplies, the RS232 drivers meet or exceed all RS232 or V.28 communication interface standards. Data rates up to 120k baud are supported, and all standard RS232 compatible mice may be driven by the LT1331.


3V Operation

$V_{CC} = 3.3V$ operation of the LT1331 results in lower driver output swing than with $V_{CC} = 5V$. The driver output swing, when operated with $V_{CC} = 3.3V$, is guaranteed to be at least $-2.7V$ to $3.7V$, with typical swing being $-3.3V$ to $4V$. This insures compatibility with all commonly used RS232 and RS562 interface circuits. Table 1 summarizes the receiver input threshold specifications for RS232 circuits from many manufacturers.

Table 1. Commonly Used RS232 Interface Circuit Receiver Thresholds

MANUFACTURER	PART NUMBER	COMPATIBLE	INPUT LOW THRESHOLD			INPUT HIGH THRESHOLD		
			MIN	TYP	MAX	MIN	TYP	MAX
Linear Technology	LT1080	✓	0.8	1.3	–	–	1.7	2.4
	LT1137A	✓	0.8	1.3	–	–	1.7	2.4
	LT1330	✓	0.8	1.3	–	–	1.7	2.4
	LT1281	✓	0.8	1.3	–	–	1.7	2.4
	All Others	✓						
Texas Instruments	SN75189	✓	0.65	1.0	1.25	0.9	1.3	1.6
	SN75189A	✓	0.65	1.0	1.25	1.55	1.9	2.25
	MAX232	✓	0.8	1.2	–	–	1.7	2.4
	SN75C185	✓	0.65	1.0	1.25	1.6	2.1	2.55
Maxim	MAX232A	✓	0.8	1.3	–	–	1.8	2.4
	MAX241	✓	0.6	1.2	–	–	1.5	2.4
Sipex	SP232	✓	0.8	1.2	–	–	1.7	2.4
	SP301	✓	0.75	–	1.35	1.75	–	2.5
Motorola	MC1489	✓	0.75	–	1.25	1.0	–	1.5
	MC1489A	✓	0.75	0.8	1.25	1.75	1.95	2.25
National	DS1489	✓	0.75	1.0	1.25	1.0	1.25	1.5
	DS14C89A	✓	0.5	–	1.9	1.3	–	2.7

Pin configuration diagram for the LT1331 in a 28-pin package. The diagram shows the internal structure of the device, including three drivers (DRIVER 1, 2, 3) and five receivers (RX1, RX2, RX3, RX4, RX5). The pins are numbered 1 through 28. Pin 1 is V+, pin 2 is VCC = 5V, pin 3 is 0.1μF, pin 4 is 2 x 0.1μF, pin 5 is DRIVER 1 OUT, pin 6 is RX1 IN, pin 7 is DRIVER 2 OUT, pin 8 is RX2 IN, pin 9 is DRIVER 3 OUT, pin 10 is RX3 IN, pin 11 is RX4 IN, pin 12 is DRIVER 3 OUT, pin 13 is RX5 IN (LOW-Q), pin 14 is ON/OFF, pin 15 is VL = 3.3V, pin 16 is GND, pin 17 is DRIVER DISABLE, pin 18 is NC, pin 19 is DRIVER 1 IN, pin 20 is RX1 OUT, pin 21 is DRIVER 2 IN, pin 22 is RX2 OUT, pin 23 is DRIVER 3 IN, pin 24 is RX3 OUT, pin 25 is DRIVER 3 IN, pin 26 is RX4 OUT, pin 27 is RX5 OUT (LOW-Q), pin 28 is V-.

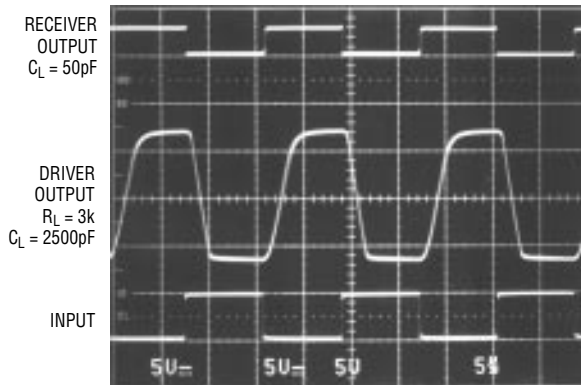

LT1331


RS232 LINE PINS PROTECTED TO $\pm 10\text{kV}$

1331 ESD TC

PACKAGE DESCRIPTION


Dimensions in inches (millimeters) unless otherwise noted.

G Package 28-Lead SSOP

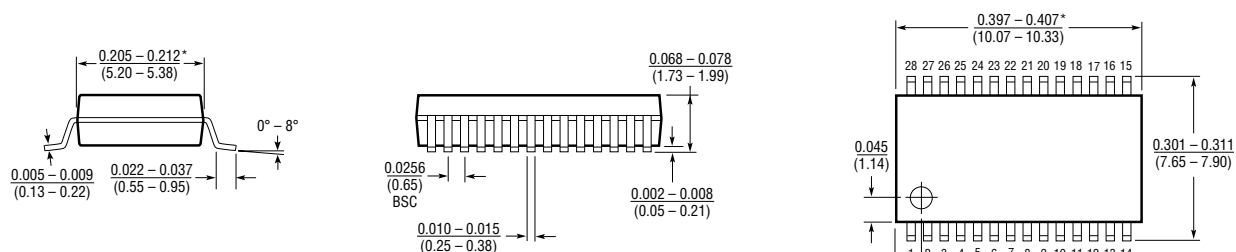


*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.006 INCH (0.15mm).

N Package 28-Lead Plastic DIP

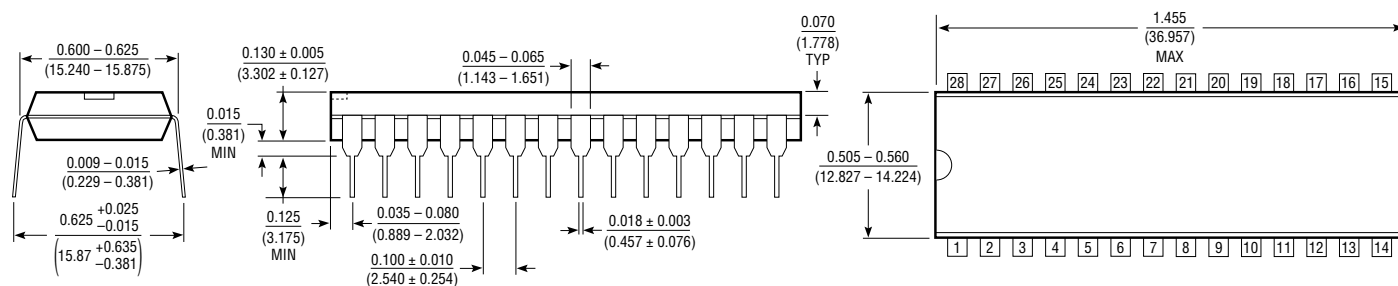

S Package 28-Lead SOL

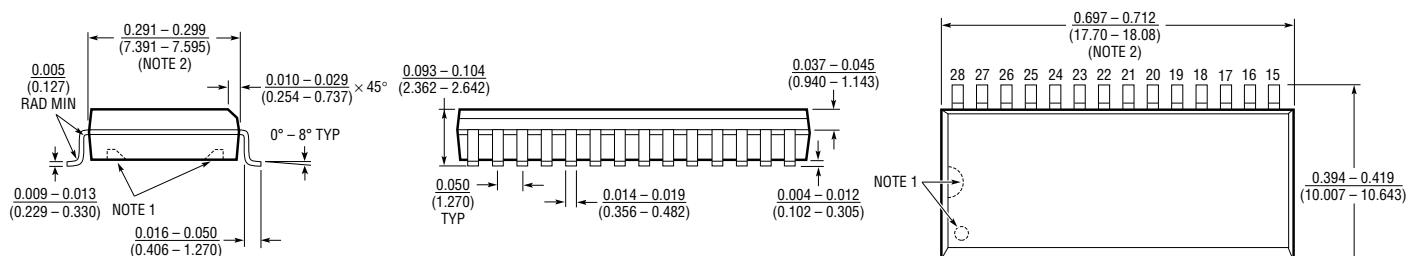

NOTE:
1. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.
THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS.
2. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.006 INCH (0.15mm).