


The **LT[®]1016** data sheet has been modified. The packaging information has been updated. Change T_{JMAX} for the N8 package and the S8 package from 100°C to **125°C**. Change θ_{JA} for the S8 package from 120°C/W to **150°C/W**. Also, **omit Note #2** for the S8 package, "LEAD MATERIAL: A-42, TIN PLATED." The correct version for this page is shown below.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

PACKAGE INFORMATION

Dimensions in inches (millimeters) unless otherwise noted.


N8 Package 8-Lead PDIP (Narrow 0.300) (LTC DWG # 05-08-1510)

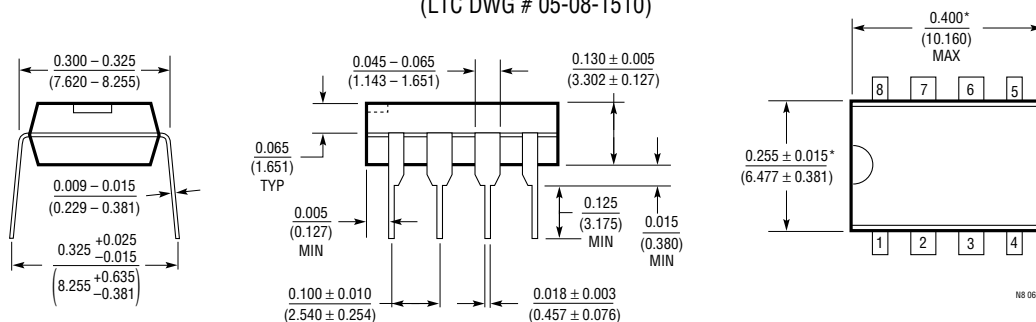

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

$T_{JMAX} = 125^{\circ}\text{C}$, $\theta_{JA} = 130^{\circ}\text{C}$

S8 Package 8-Lead Plastic Small Outline (Narrow 0.150) (LTC DWG # 05-08-1610)

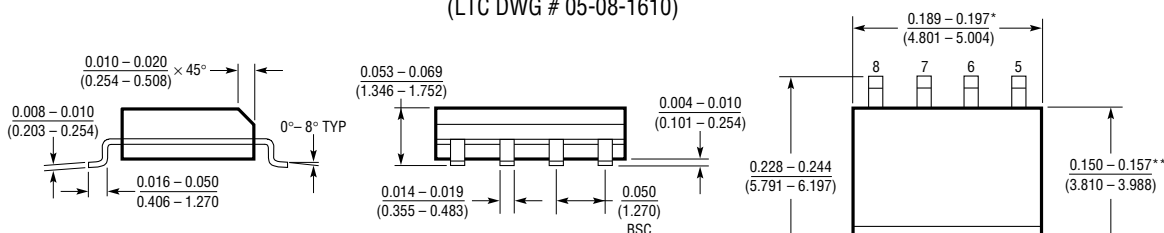

*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

$T_{JMAX} = 125^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$

NOTE:

1. PKG MATERIAL: PLASTIC

For further information regarding this specification notice contact:

Linear Technology Corporation
 1630 McCarthy Blvd.
 Milpitas, California 95035-7417
 Attn: Product Marketing Manager
 Phone: (408) 432-1900, Ext. 2456