


The specifications for the **LT1101IS** are identical to those of the **LT1101S** at **25°C** and **LT1101IN8** from **–40°C to 85°C** with the following additions. For complete specifications, typical performance curves and applications information, please see the **LT1101** data sheet.


 LTC and LT are registered trademarks of Linear Technology Corporation.

ELECTRICAL CHARACTERISTICS $V_S = 5V, 0V$ or $\pm 15V$, Gain = 10 or 100, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	$-40^{\circ}C \leq T_A \leq 85^{\circ}C$		110	950	μV
$\frac{\Delta V_{OS}}{\Delta T}$	Input Offset Voltage Drift (Note 1)	$-40^{\circ}C \leq T_A \leq 85^{\circ}C$		0.5	4.8	$\mu V/^{\circ}C$

Note 1: Not 100% production tested.

PACKAGE/ORDER INFORMATION

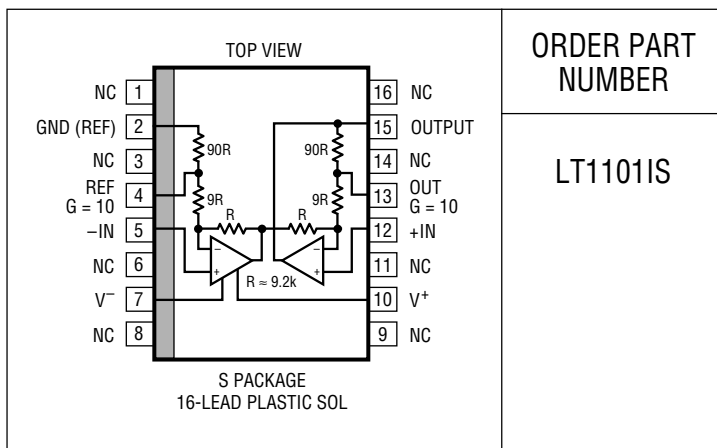

For further information regarding this specification notice contact:

Linear Technology Corporation
 1630 McCarthy Blvd.
 Milpitas, California 95035-7487
 Attn: Product Marketing Manager
 Phone: (408) 432-1900