

# SN54HC4514, SN74HC4514 4-LINE TO 16-LINE DECODERS/DEMULTIPLEXERS WITH ADDRESS LATCHES

D2684, DECEMBER 1982—REVISED JUNE 1989

- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

## description

These devices present two output options of a 4-line to 16-line decoder with latched inputs. The 'HC4514 presents a high level at the selected output.


These devices consist of four storage latches with common latch enable (LE) and inhibit ( $\bar{G}$ ) inputs. When a low signal is applied to the LE input, the input data is stored, decoded, and presented to the output. When  $\bar{G}$  is high, all sixteen 'HC4514 outputs are at a low logic level.

The SN54HC4514 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74HC4514 is characterized for operation from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .


FUNCTION TABLE

INPUTS						OUTPUT SELECTED	OUTPUTS
LE	$\bar{G}$	D	C	B	A		
H	L	L	L	L	L	0	Selected Output = H All others = L
H	L	L	L	L	H	1	
H	L	L	L	H	L	2	
H	L	L	L	H	H	3	
H	L	L	H	L	L	4	
H	L	L	H	L	H	5	
H	L	L	H	H	L	6	
H	L	L	H	H	H	7	
H	L	H	L	L	L	8	
H	L	H	L	L	H	9	
H	L	H	L	H	L	10	
H	L	H	L	H	H	11	
H	L	H	H	L	L	12	
H	L	H	H	L	H	13	
H	L	H	H	H	L	14	
H	L	H	H	H	H	15	
X	H	X	X	X	X		All = L
L	L	X	X	X	X		All outputs remain in state existing before LE!

SN54HC4514 ... JT PACKAGE  
SN74HC4514 ... DW OR NT PACKAGE  
(TOP VIEW)



SN54HC4514 ... FK PACKAGE  
(TOP VIEW)

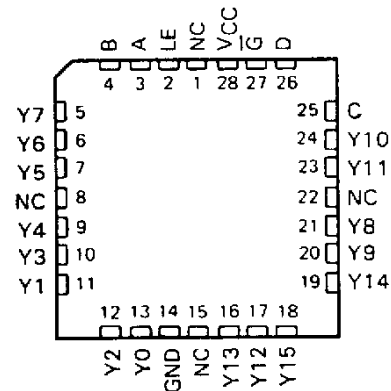

NC—No internal connection

UNLESS OTHERWISE NOTED this document contains  
PRODUCTION DATA information current as of  
publication date. Products conform to specifications  
per the terms of Texas Instruments standard  
warranty. Production processing does not necessarily  
include testing of all parameters.


TEXAS  
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1989, Texas Instruments Incorporated

**SN54HC4514, SN74HC4514**  
**4-LINE TO 16-LINE DECODERS/DEMULTIPLEXERS**  
**WITH ADDRESS LATCHES**

logic symbols (alternatives)<sup>†</sup>

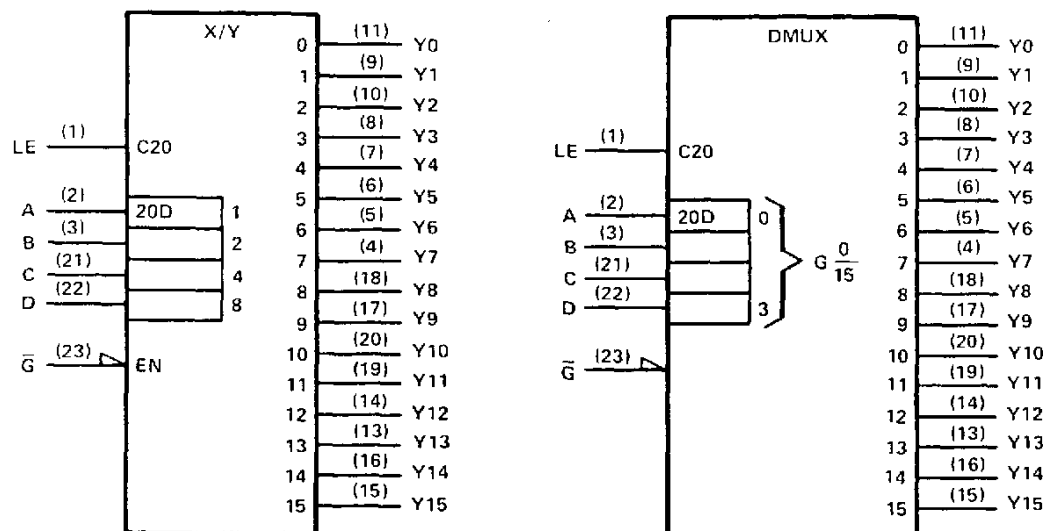


<sup>†</sup>These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.  
 Pin numbers shown are for DW, JT, and NT packages.

**TEXAS**  
**INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54HC4514, SN74HC4514**  
**4-LINE TO 16-LINE DECODERS/DEMULTIPLEXERS**  
**WITH ADDRESS LATCHES**

logic diagram (positive logic)

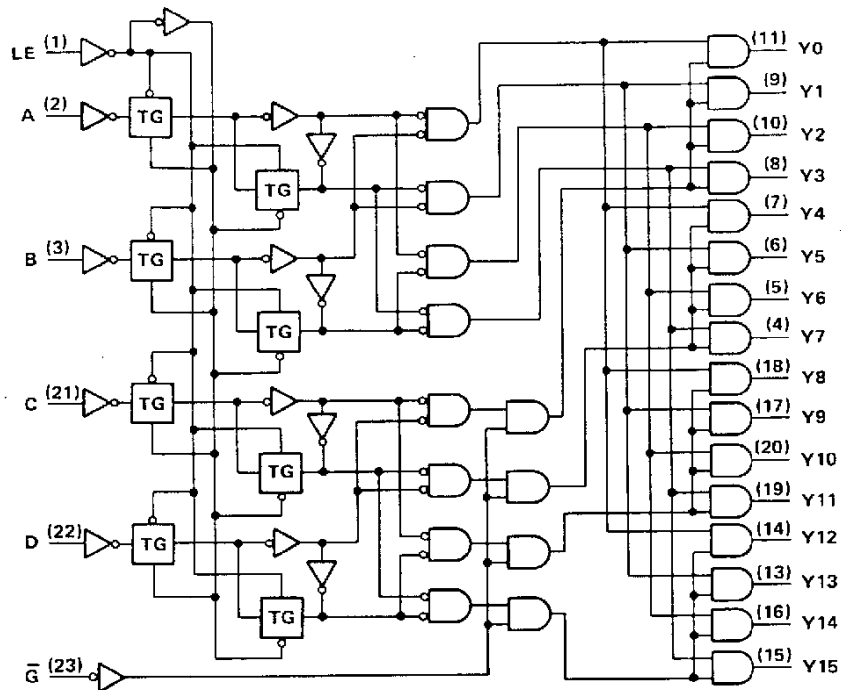

Pin numbers shown are for DW, JT, and NT packages.

**TEXAS**  
**INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54HC4514, SN74HC4514**  
**4-LINE TO 16-LINE DECODERS/DEMULTIPLEXERS**  
**WITH ADDRESS LATCHES**

**absolute maximum ratings over operating free-air temperature range†**

Supply voltage, $V_{CC}$	−0.5 V to 7 V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ )	±20 mA
Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{CC}$ )	±20 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	±25 mA
Continuous current through $V_{CC}$ or GND pins	±50 mA
Lead temperature 1,6 mm (1/16 in) from case for 60 s: FK or JT package	300°C
Lead temperature 1,6 mm (1/16 in) from case for 10 s: DW or NT package	260°C
Storage temperature range	−65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

**recommended operating conditions**

			SN54HC4514			SN74HC4514			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage			2	5	6	2	5	6	V
V <sub>IH</sub> High-level input voltage	V <sub>CC</sub> = 2 V		1.5			1.5			V
	V <sub>CC</sub> = 4.5 V		3.15			3.15			
	V <sub>CC</sub> = 6 V		4.2			4.2			
V <sub>IL</sub> Low-level input voltage	V <sub>CC</sub> = 2 V		0		0.3	0		0.3	V
	V <sub>CC</sub> = 4.5 V		0		0.9	0		0.9	
	V <sub>CC</sub> = 6 V		0		1.2	0		1.2	
V <sub>I</sub> Input voltage			0		V <sub>CC</sub>	0		V <sub>CC</sub>	V
V <sub>O</sub> Output voltage			0		V <sub>CC</sub>	0		V <sub>CC</sub>	V
t <sub>t</sub> Input transition (rise and fall) times	V <sub>CC</sub> = 2 V		0		1000	0		1000	ns
	V <sub>CC</sub> = 4.5 V		0		500	0		500	
	V <sub>CC</sub> = 6 V		0		400	0		400	
T <sub>A</sub> Operating free-air temperature			−55		125	−40		85	°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$V_{CC}$	$T_A = 25^\circ\text{C}$			SN54HC4514		SN74HC4514		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
$V_{OH}$	$V_I = V_{IH}$ or $V_{IL}$ , $I_{OH} = -20\text{ }\mu\text{A}$	2 V	1.9	1.998		1.9		1.9		V
		4.5 V	4.4	4.499		4.4		4.4		
		6 V	5.9	5.999		5.9		5.9		
	$V_I = V_{IH}$ or $V_{IL}$ , $I_{OH} = -4\text{ mA}$	4.5 V	3.98	4.30		3.7		3.84		
$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$ , $I_{OH} = -5.2\text{ mA}$	6 V	5.48	5.80		5.2		5.34		V
	$V_I = V_{IH}$ or $V_{IL}$ , $I_{OL} = 20\text{ }\mu\text{A}$	2 V		0.002	0.1		0.1		0.1	
		4.5 V		0.001	0.1		0.1		0.1	
		6 V		0.001	0.1		0.1		0.1	
	$V_I = V_{IH}$ or $V_{IL}$ , $I_{OL} = 4\text{ mA}$	4.5 V		0.17	0.26		0.4		0.33	
$I_I$	$V_I = V_{CC}$ or 0	6 V		±0.1	±100		±1000		±1000	nA
	$V_I = V_{CC}$ or 0, $I_O = 0$	6 V			8		160		80	μA
$C_i$		2 to 6 V		3	10		10		10	pF

TEXAS  
INSTRUMENTS

POST OFFICE BOX 855012 • DALLAS, TEXAS 75285

**SN54HC4514, SN74HC4514**  
**4-LINE TO 16-LINE DECODERS/DEMULTIPLEXERS**  
**WITH ADDRESS LATCHES**

timing requirements over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	V <sub>CC</sub>	T <sub>A</sub> = 25°C		SN54HC4514		SN74HC4514		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>w</sub> Pulse duration, LE high	2 V	80		119		100		ns
	4.5 V	16		24		20		
	6 V	14		20		17		
t <sub>su</sub> Setup time, A thru D before LE↑	2 V	100		149		125		ns
	4.5 V	20		30		25		
	6 V	17		2		21		
t <sub>h</sub> Hold time, A thru D before LE↓	2 V	5				5		ns
	4.5 V	5		5		5		
	6 V	5		5		5		

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), C<sub>L</sub> = 50 pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub>	T <sub>A</sub> = 25°C			SN54HC4514		SN74HC4514		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t <sub>pd</sub>	A thru D	Any	2 V		115	230		343		290	ns
			4.5 V		23	46		69		58	
			6 V		20	39				49	
t <sub>pd</sub>	LE	Any	2 V		115	230		343		290	ns
			4.5 V		23	46		69		58	
			6 V		20	39		58		49	
t <sub>pd</sub>	$\overline{G}$	Any	2 V		88	175		261		221	ns
			4.5 V		18	35		52		44	
			6 V		15	30		44		37	
t <sub>t</sub>		Any	2 V		38	75		110		95	ns
			4.5 V		8	15		22		19	
			6 V		6	13		19		16	

C <sub>pd</sub>	Power dissipation capacitance	No load, T <sub>A</sub> = 25°C	60 pF typ
-----------------	-------------------------------	--------------------------------	-----------

Note 1: Load circuits and voltage waveforms are shown in Section 1.



POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

## **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

**TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.**

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.