

SN54ALS762, SN54ALS763, SN54AS762, SN54AS763 SN74ALS762, SN74ALS763, SN74AS762, SN74AS763 OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUTS

SDAS067A – DECEMBER 1983 – REVISED MAY 1986

- Package Options include Plastic Small Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- 'ALS762 and 'AS762 Have True and Complementary Outputs
- 'ALS763 and 'AS763 Have Complementary G and \overline{G} Inputs
- Open-Collector Outputs Drive Bus Lines or Buffer Memory Address Registers
- Eliminates the Need for 3-State Overlap Protection
- Current Sinking Capability Up to 64 mA
- Dependable Texas Instruments Quality and Reliability


description

These octal buffers and line drivers are designed specifically to improve the performance of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters by eliminating the need for 3-state overlap protection. The designer has a choice of selected combinations of inverting and noninverting outputs, symmetrical \overline{G} (active-low output control) inputs, and complementary G and \overline{G} inputs.


The -1 versions of the SN74ALS' parts are identical to their standard versions except that the recommended maximum I_{OL} is increased to 48-mA. There are no -1 versions of the SN54ALS' parts.

The SN54' family is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74' family is characterized for operation from 0°C to 70°C .

SN54ALS', SN54AS' ... J PACKAGE
SN74ALS', SN74AS' ... DW OR N PACKAGE
(TOP VIEW)


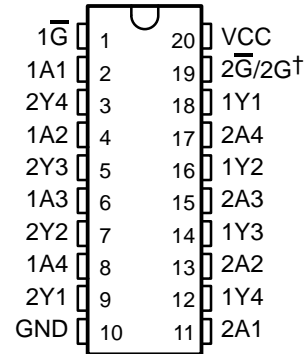


SN54ALS', SN54AS' ... FK PACKAGE
(TOP VIEW)

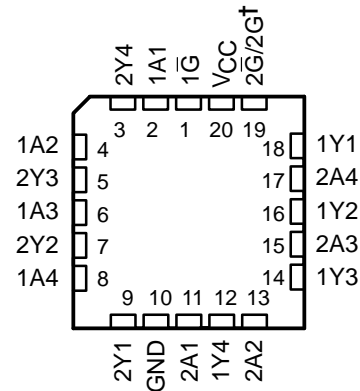



†2 \overline{G} for 'ALS762, 'AS762 and 2G 'ALS763, 'AS763

logic symbols†

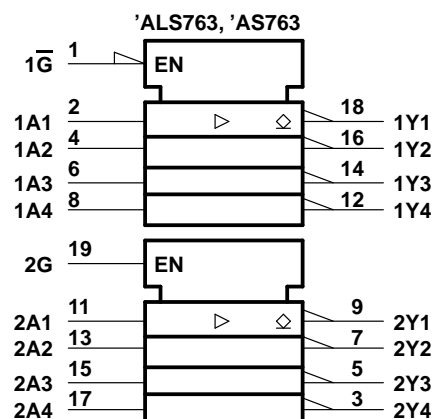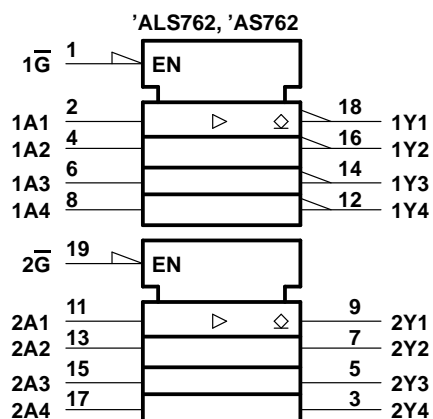

† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagrams (positive logic)

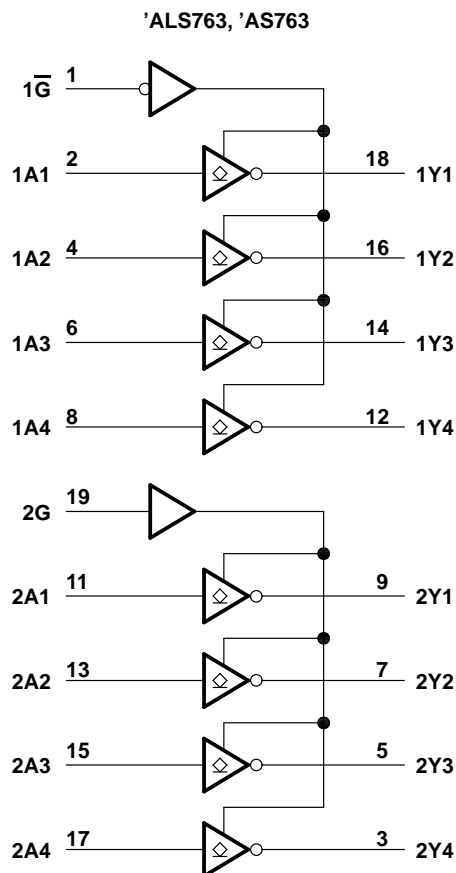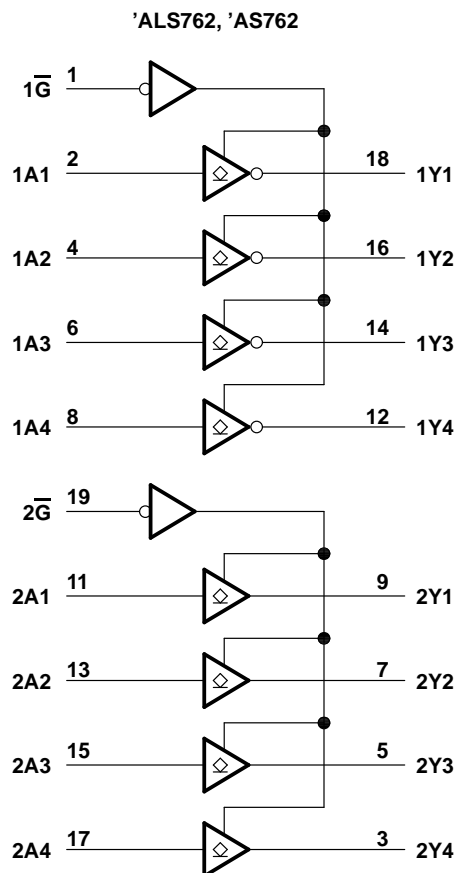

SN54ALS762, SN74ALS762

OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUT

SDAS067A – DECEMBER 1983 – REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Off-state output voltage	7 V
Operating free-air temperature range: SN54ALS762	–55°C to 125°C
SN74ALS762	0°C to 70°C
Storage temperature range	–65°C to 150°C

recommended operating conditions

		SN54ALS762			SN74ALS762			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
V_{OH}	High-level output voltage			5.5			5.5	mA
I_{OL}	Low-level output current			12			24	mA
							48†	
T_A	Operating free-air temperature	–55		125	0		70	°C

† The extended limits apply only if V_{CC} is maintained between 4.75 V and 5.25 V. The 48-mA limit applies for the SN74ALS762-1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS762			SN74ALS762			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V_{IK}	$V_{CC} = 4.5$ V, $I_I = -18$ mA			–1.2			–1.2	V
I_{OH}	$V_{CC} = 4.5$ V, $V_{OH} = 5.5$ V			0.1			0.1	mA
V_{OL}	$V_{CC} = 4.5$ V, $I_{OL} = 12$ mA		0.25	0.4		0.25	0.4	V
	$V_{CC} = 4.5$ V, $I_{OL} = 24$ mA ($I_{OL} = 48$ mA for -1 versions)					0.35	0.55	
I_I	$V_{CC} = 5.5$ V, $V_I = 7$ V			0.1			0.1	mA
I_{IH}	$V_{CC} = 5.5$ V, $V_I = 2.7$ V			20			20	μA
I_{IL}	$V_{CC} = 5.5$ V, $V_I = 0.4$ V			–0.1			–0.1	mA
I_{CC}	'ALS762 $V_{CC} = 5.5$ V	Outputs high			11			mA
		Outputs low			18			

‡ All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

'ALS762 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5.5$ V, $C_L = 50$ pF, $R_L = 680 \Omega$, $T_A = 25^\circ\text{C}$	$V_{CC} = 4.5$ V to 5.5 V, $C_L = 50$ pF, $R_L = 680 \Omega$, $T_A = \text{MIN to MAX}^\S$			
-----------	-----------------	----------------	---	--	--	--	--

SN54ALS763, SN74ALS763

OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUT

SDAS067A – DECEMBER 1983 – REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Off-state output voltage	7 V
Operating free-air temperature range: SN54ALS763	–55°C to 125°C
SN74ALS763	0°C to 70°C
Storage temperature range	–65°C to 150°C

recommended operating conditions

		SN54ALS763			SN74ALS763			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
V_{OH}	High-level output voltage			5.5			5.5	V
I_{OL}	Low-level output current			12			24	mA
							48†	
T_A	Operating free-air temperature	–55		125	0		70	°C

† The extended limits apply only if V_{CC} is maintained between 4.75 V and 5.25 V. The 48-mA limit applies for the SN74ALS763–1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS763			SN74ALS763			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V_{IK}	$V_{CC} = 4.5$ V, $I_I = -18$ mA			–1.2			–1.2	V
I_{OH}	$V_{CC} = 4.5$ V, $V_{OH} = 5.5$ V			0.1			0.1	mA
V_{OL}	$V_{CC} = 4.5$ V, $I_{OL} = 12$ mA		0.25	0.4		0.25	0.4	V
	$V_{CC} = 4.5$ V, $I_{OL} = 24$ mA					0.35	0.5	
	($I_{OL} = 48$ mA for -1 versions)							
I_I	$V_{CC} = 5.5$ V, $V_I = 7$ V			0.1			0.1	mA
I_{IH}	$V_{CC} = 5.5$ V, $V_I = 2.7$ V			20			20	μA
I_{IL}	$V_{CC} = 5.5$ V, $V_I = 0.4$ V			–0.1			–0.1	mA
I_{CC}	'ALS763 $V_{CC} = 5.5$ V			7			7	mA
				11			11	
				14			14	

‡ All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

'ALS763 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5.5$ V, $C_L = 50$ pF, $R_L = 680 \Omega$, $T_A = 25^\circ\text{C}$	$V_{CC} = 4.5$ V to 5.5 V, $C_L = 50$ pF, $R_L = 680 \Omega$, $T_A = \text{MIN to MAX$
-----------	--------------	-------------	---	--

SN54AS762, SN54AS763, SN74AS762, SN74AS763

OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUT

SDAS067A – DECEMBER 1983 – REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Off-state output voltage	7 V
Operating free-air temperature range: SN54AS762, SN54AS763	–55°C to 125°C
SN74AS762, SN74AS763	0°C to 70°C
Storage temperature range	–65°C to 150°C

recommended operating conditions

		SN54AS762 SN54AS763			SN74AS762 SN74AS763			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.8			0.8	V
V_{OH}	High-level output voltage			5.5			5.5	V
I_{OL}	Low-level output current			48			64	mA
T_A	Operating free-air temperature	–55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54AS762 SN54AS763			SN74AS762 SN74AS763			UNIT	
				MIN	TYP†	MAX	MIN	TYP†	MAX		
V_{IK}		$V_{CC} = 4.5\text{ V}$, $I_I = -18\text{ mA}$				–1.2			–1.2	V	
I_{OH}		$V_{CC} = 4.5\text{ V}$, $V_{OH} = 5.5\text{ V}$				0.1			0.1	mA	
V_{OL}		$V_{CC} = 4.5\text{ V}$, $I_{OL} = 48\text{ mA}$				0.55				V	
		$V_{CC} = 4.5\text{ V}$, $I_{OL} = 64\text{ mA}$							0.55		
I_I		$V_{CC} = 5.5\text{ V}$, $V_I = 7\text{ V}$				0.1			0.1	mA	
I_{IH}		$V_{CC} = 5.5\text{ V}$, $V_O = 2.7\text{ V}$				20			20	μA	
I_{IL}	'AS762 2A Inputs only	$V_{CC} = 5.5\text{ V}$, $V_I = 0.4\text{ V}$				–1			–1	mA	
	All others					–0.5			–0.5		
I_{CC}	'AS762	$V_{CC} = 5.5\text{ V}$	Output high			15	23		15	23	mA
			Output low			55	87		55	87	
	'AS763	$V_{CC} = 5.5\text{ V}$	Output high			10	16		10	16	
			Output low			52	82		52	82	

† All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

SN54AS762, SN54AS763, SN74AS762, SN74AS763

OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUTS

SDAS067A – DECEMBER 1983 – REVISED MAY 1986

'AS762 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $C_L = 50 \text{ pF},$ $R_L = 500 \text{ } \Omega,$ $T_A = \text{MIN to MAX}^\dagger$				UNIT	
			SN54AS762		SN74AS762			
			MIN	MAX	MIN	MAX		
t_{PLH}	1A	1Y	3	20	3	19	ns	
t_{PHL}			1	7	1	6		
t_{PLH}	2A	2Y	3	19.5	3	18.5	ns	
t_{PHL}			1	7	1	6		
t_{PLH}	\overline{G}	1Y	3	22	3	19.5	ns	
t_{PHL}			1	8	1	7.5		
t_{PLH}	\overline{G}	2Y	3	20	3	19	ns	
t_{PHL}			1	8	1	7		

'AS763 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $C_L = 50 \text{ pF},$ $R_L = 500 \text{ } \Omega,$ $T_A = \text{MIN to MAX}^\dagger$				UNIT	
			SN54AS763		SN74AS763			
			MIN	MAX	MIN	MAX		
t_{PLH}	A	Y	3	20	3	19	ns	
t_{PHL}			1	7	1	6		
t_{PLH}	\overline{G}	Y	3	22	3	19.5	ns	
t_{PHL}			1	8.5	1	7.5		
t_{PLH}	G	Y	3	22	3	20	ns	
t_{PHL}			1	8.5	1	8		

[†] The conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.