

SN54ALS465A THRU SN54ALS468A SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS

SDAS223 – D2661, APRIL 1982 – REVISED MAY 1986

- Mechanically and Functionally Interchangeable With DM71/81LS97 and DM71/81LS98
- P-N-P Inputs Reduce Bus Loading
- 3-State Outputs Rated at I_{OL} of 12 mA and 24 mA for SN54ALS' and SN74ALS', Respectively
- Package Options Include Plastic Small Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability


DEVICE	DATA PATH
'ALS465A	True
'ALS466A	Inverting
'ALS467A	True
'ALS468A	Inverting

description


These octal buffers utilize the latest advanced low-power Schottky technology. The 'ALS465A and 'ALS466A have a two-input active-low AND enable gate controlling all eight data buffers. The 'ALS467A and 'ALS468A have two separate active-low enable inputs each controlling four data buffers. In each case, a high level on any \bar{G} places the affected outputs at high impedance.

The SN54ALS465A, SN54ALS466A, SN54ALS467A, and SN54ALS468A are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS465A, SN74ALS466A, SN74ALS467A, and SN74ALS468A are characterized for operation from 0°C to 70°C .


SN54ALS465A, SN54ALS466A . . . J PACKAGE
SN74ALS465A, SN74ALS466A . . . DW OR N PACKAGE
(TOP VIEW)

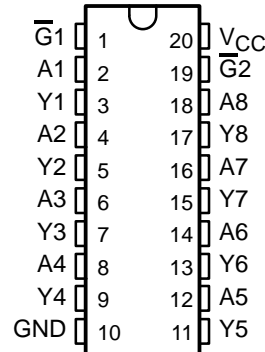


SN54ALS465A, SN54ALS466A . . . FK PACKAGE
(TOP VIEW)

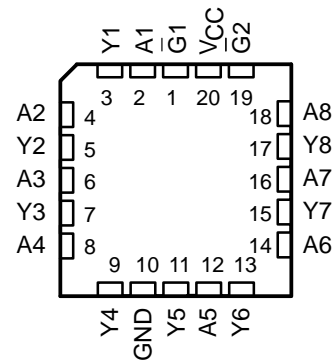

SN54ALS467A, SN54ALS468A . . . J PACKAGE
SN74ALS467A, SN74ALS468A . . . DW OR N PACKAGE
(TOP VIEW)

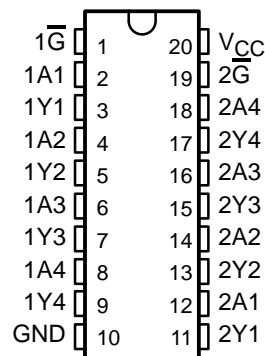

SN54ALS467A, SN54ALS468A . . . FK PACKAGE
(TOP VIEW)

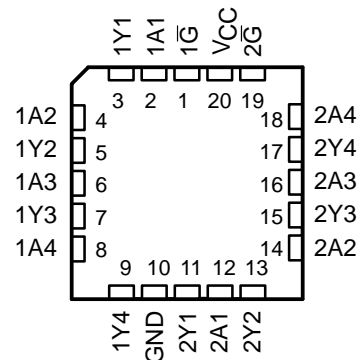

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1986, Texas Instruments Incorporated
5basic


SN54ALS465A THRU SN54ALS468A SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS

SDAS223 – D2661, APRIL 1982 – REVISED MAY 1986

logic symbols†

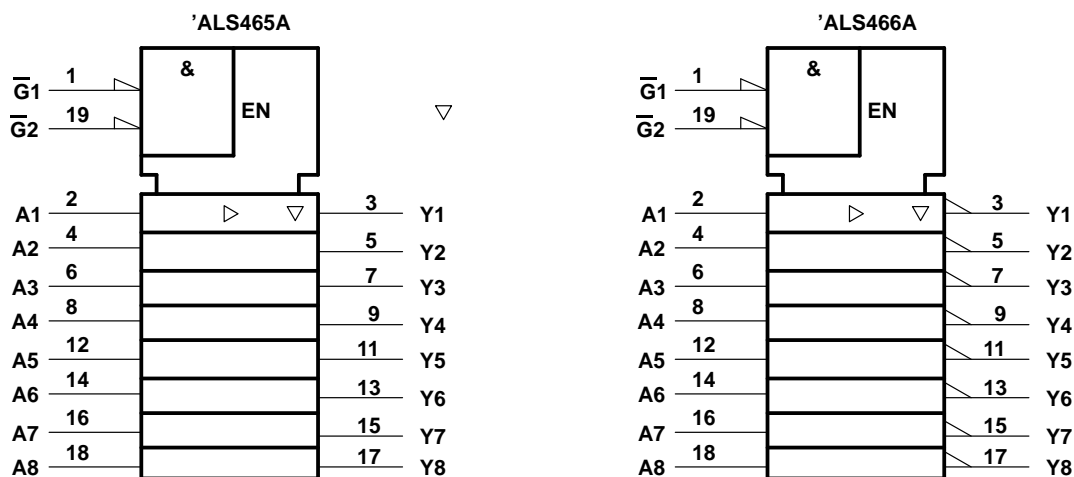

logic diagrams (positive logic)

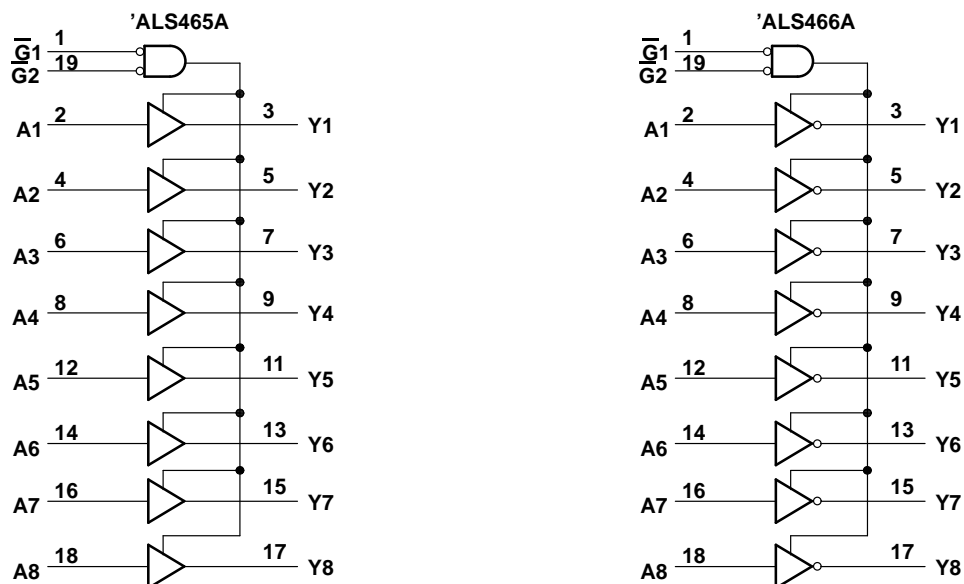


† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, J, and N packages.


SN54ALS465A THRU SN54ALS468A SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS

SDAS223 – D2661, APRIL 1982 – REVISED MAY 1986

logic symbols†

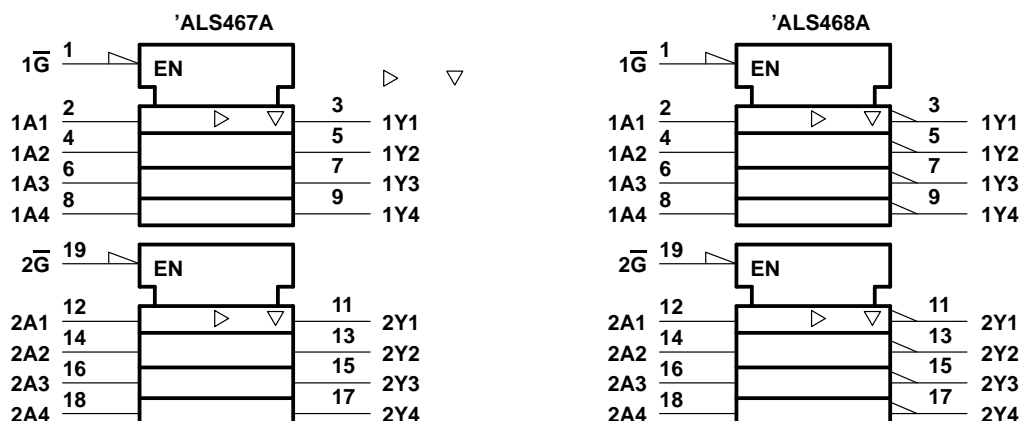

logic diagrams (positive logic)

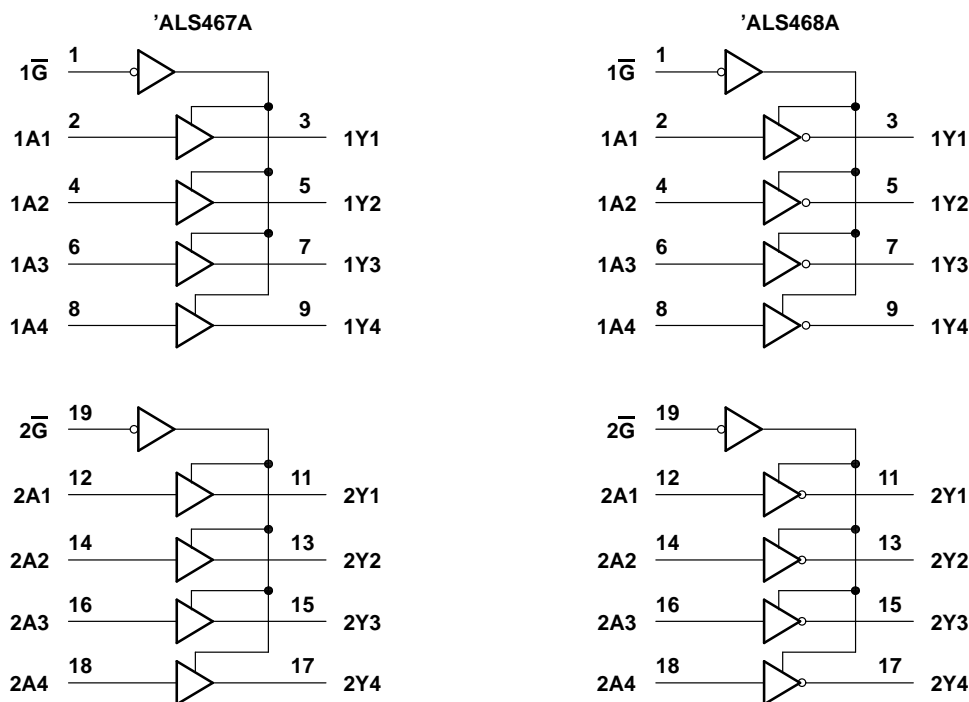

† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, J, and N packages.

SN54ALS465A THRU SN54ALS468A SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS

SDAS223 – D2661, APRIL 1982 – REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS465A thru SN54ALS468A	–55°C to 125°C
SN74ALS465A thru SN74ALS468A	0°C to 70°C
Storage temperature range	–65°C to 150°C

recommended operating conditions

		SN54ALS465A THRU SN54ALS468A			SN74ALS465A THRU SN74ALS468A			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
I_{OH}	High-level output current			–12			–15	mA
I_{OL}	Low-level output current			12			24	mA
							48†	
T_A	Operating free-air temperature	–55		125	0		70	°C

† The extended limit applies only if V_{CC} is maintained between 4.75 V and 5.25 V.

The 48-mA limit applies for SN74ALS465A-1, SN74ALS466A-1, SN74ALS467A-1, and SN74ALS468A-1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54ALS465A THRU SN54ALS468A			SN74ALS465A THRU SN74ALS468A			UNIT
				MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IK}		V _{CC} = 4.5 V,	I _I = –18 mA	–1.5			–1.5			V
V _{OH}		V _{CC} = 4.5 V to 5.5 V,	I _{OH} = –0.4 mA	V _{CC} –2			V _{CC} –2			V
		V _{CC} = 4.5 V,	I _{OH} = –3 mA	2.4	3.2		2.4	3.2		
		V _{CC} = 4.5 V,	I _{OH} = –12 mA	2						
		V _{CC} = 4.5 V,	I _{OH} = –15 mA				2			
V _{OL}		V _{CC} = 4.5 V,	I _{OL} = 12 mA	0.25 0.4			0.25 0.4			V
		V _{CC} = 4.5 V, (I _{OL} = 48 mA –1 versions)	I _{OL} = 24 mA				0.35 0.5			
I _{OZH}		V _{CC} = 5.5 V,	V _O = 2.7 V	20			20			μA
I _{OZL}		V _{CC} = 5.5 V,	V _O = 0.4 V	–20			–20			μA
I _I		V _{CC} = 5.5 V,	V _I = 7 V	0.1			0.1			mA
I _{IH}		V _{CC} = 5.5 V,	V _I = 2.7 V	20			20			μA
I _{IL}		V _{CC} = 5.5 V,	V _I = 0.4 V	–0.1			–0.1			mA
I _O [§]		V _{CC} = 5.5 V,	V _O = 2.25 V	–30		–112	–30		–112	mA
I _{CC}	'ALS465A 'ALS467A	V _{CC} = 5.5 V	Outputs high	11 21		11 16		mA		
			Outputs low	19 33		19 28				
			Outputs disabled	23 38		23 33				
	'ALS466A 'ALS468A	V _{CC} = 5.5 V	Outputs high	7 15		7 10		mA		
			Outputs low	16 29		16 24				
			Outputs disabled	19 32		19 27				

‡ All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

§ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .



SN54ALS465A THRU SN54ALS468A
SN74ALS465A THRU SN74ALS468A
OCTAL BUFFERS WITH 3-STATE OUTPUTS

SDAS223 – D2661, APRIL 1982 – REVISED MAY 1986

'ALS465A, 'ALS467A switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = MIN to MAX†				UNIT
			SN54ALS465A		SN74ALS465A		
			SN54ALS467A		SN74ALS467A		
			MIN	MAX	MIN	MAX	
t _{PLH}	A	Y	2	16	2	13	ns
t _{PHL}			4	15	4	12	
t _{PZH}	\overline{G}	Any Y	4	27	4	23	ns
t _{PZL}			5	30	5	25	
t _{PHZ}	\overline{G}	Any Y	2	12	2	10	ns
t _{PLZ}			3	21	3	18	

'ALS466A, ALS468A switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = MIN to MAX†				UNIT
			SN54ALS466A		SN74ALS466A		
			SN54ALS468A		SN74ALS468A		
			MIN	MAX	MIN	MAX	
t _{PLH}	A	Y	3	14	3	12	ns
t _{PHL}			2	11	2	9	
t _{PZH}	\overline{G}	Any Y	4	21	4	16	ns
t _{PZL}			7	25	7	23	
t _{PHZ}	\overline{G}	Any Y	2	12	2	10	ns
t _{PLZ}			2	20	2	17	

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.