

# SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699

## SYNCHRONOUS UP/DOWN COUNTERS WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

SDLS199 D2424, JANUARY 1981—REVISED MARCH 1988

- 4-Bit Counters/Registers
- Multiplexed Outputs for Counter or Latched Data
- 3-State Outputs Drive Bus Lines Directly
- 'LS696 . . . Decade Counter, Direct Clear
- 'LS697 . . . Binary Counter, Direct Clear
- 'LS699 . . . Binary Counter, Synchronous Clear


### description

These low-power Schottky LSI devices incorporate synchronous up/down counters, four-bit D-type registers, and quadruple two-line to one-line multiplexers with three state outputs in a single 20-pin package. The up/down counters are programmable from the data inputs and feature enable  $\bar{P}$  and enable  $\bar{T}$  and a ripple-carry output for easy expansion. The register/clear select input  $R/\bar{C}$ , selects the counter when low and the register when high for the three-state outputs,  $Q_A$ ,  $Q_B$ ,  $Q_C$ , and  $Q_D$ . These outputs are rated at 12 and 24 milliamperes (54LS/74LS) for good bus driving performance.


Both the counter CCK and register clock RCK are positive-edge triggered. The counter clear  $\overline{CCLR}$  is active low and is asynchronous on the 'LS696 and 'LS697, synchronous on the 'LS699. Loading of the counter is accomplished when  $\overline{LOAD}$  is taken low and a positive transition occurs on the counter clock CCK.

Expansion is easily accomplished by connecting  $\overline{RCO}$  of the first stage to  $\overline{ENT}$  of the second stage, etc. All ENP inputs can be tied common and used as a master enable or disable control.


SN54LS696, SN54LS697,  
SN54LS699 . . . J OR W PACKAGE  
SN74LS696, SN74LS697,  
SN74LS699 . . . DW OR N PACKAGE  
(TOP VIEW)



SN54LS696, SN54LS697,  
SN54LS699 . . . FK PACKAGE  
(TOP VIEW)

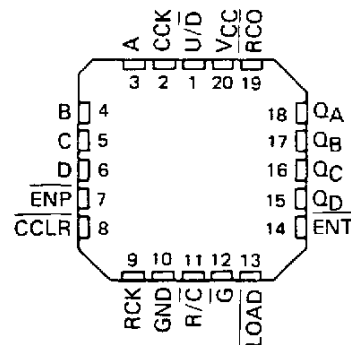

### schematics of inputs and outputs

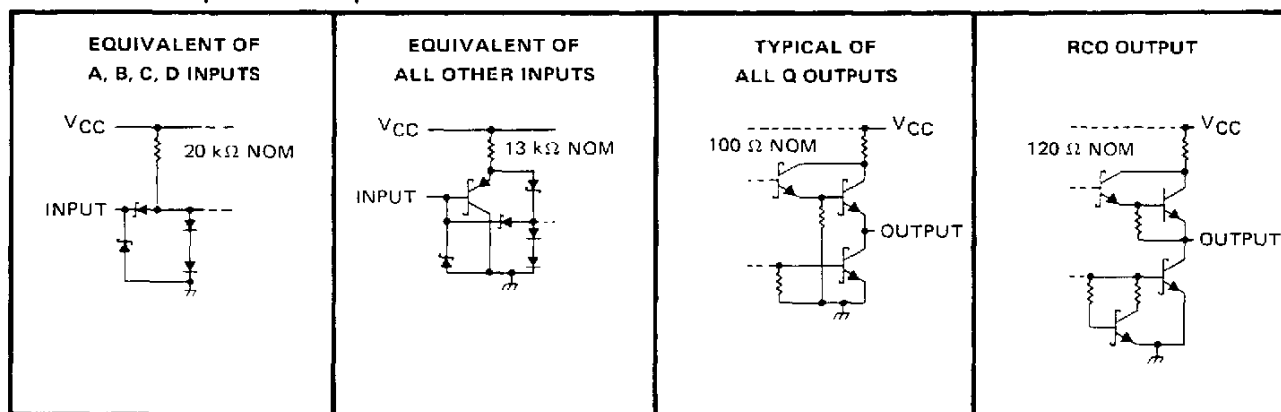


PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS  
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**


logic symbols†

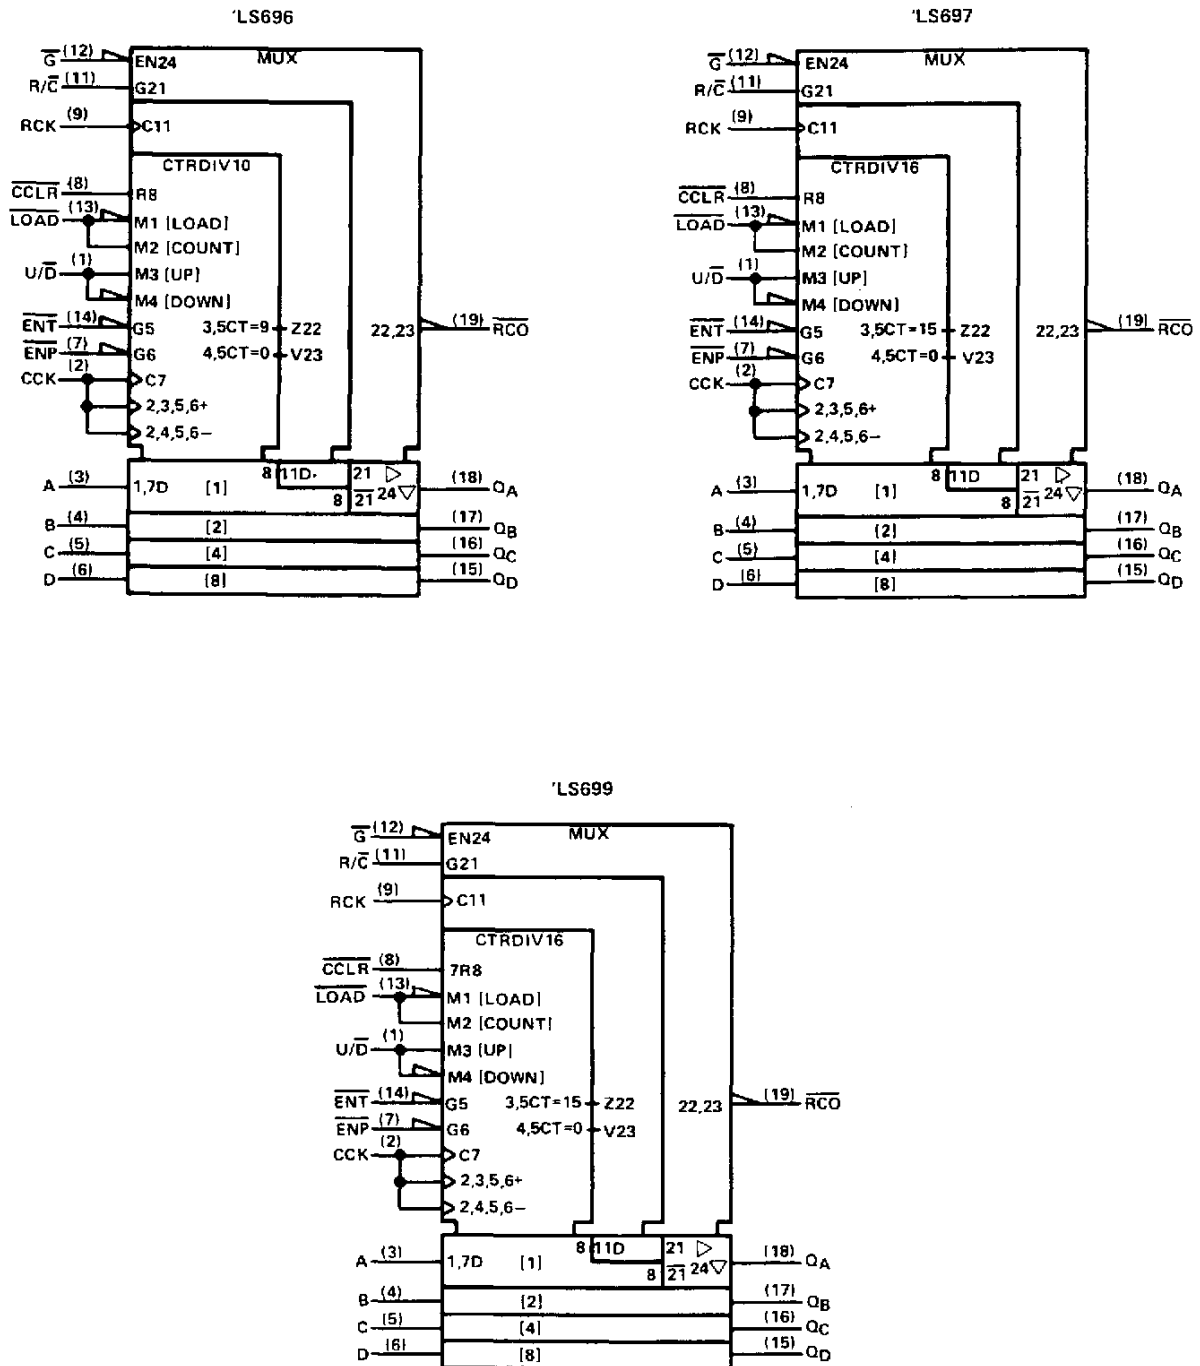

†These symbols are in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.

**SN54LS696, SN74LS696**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

logic diagrams (positive logic)

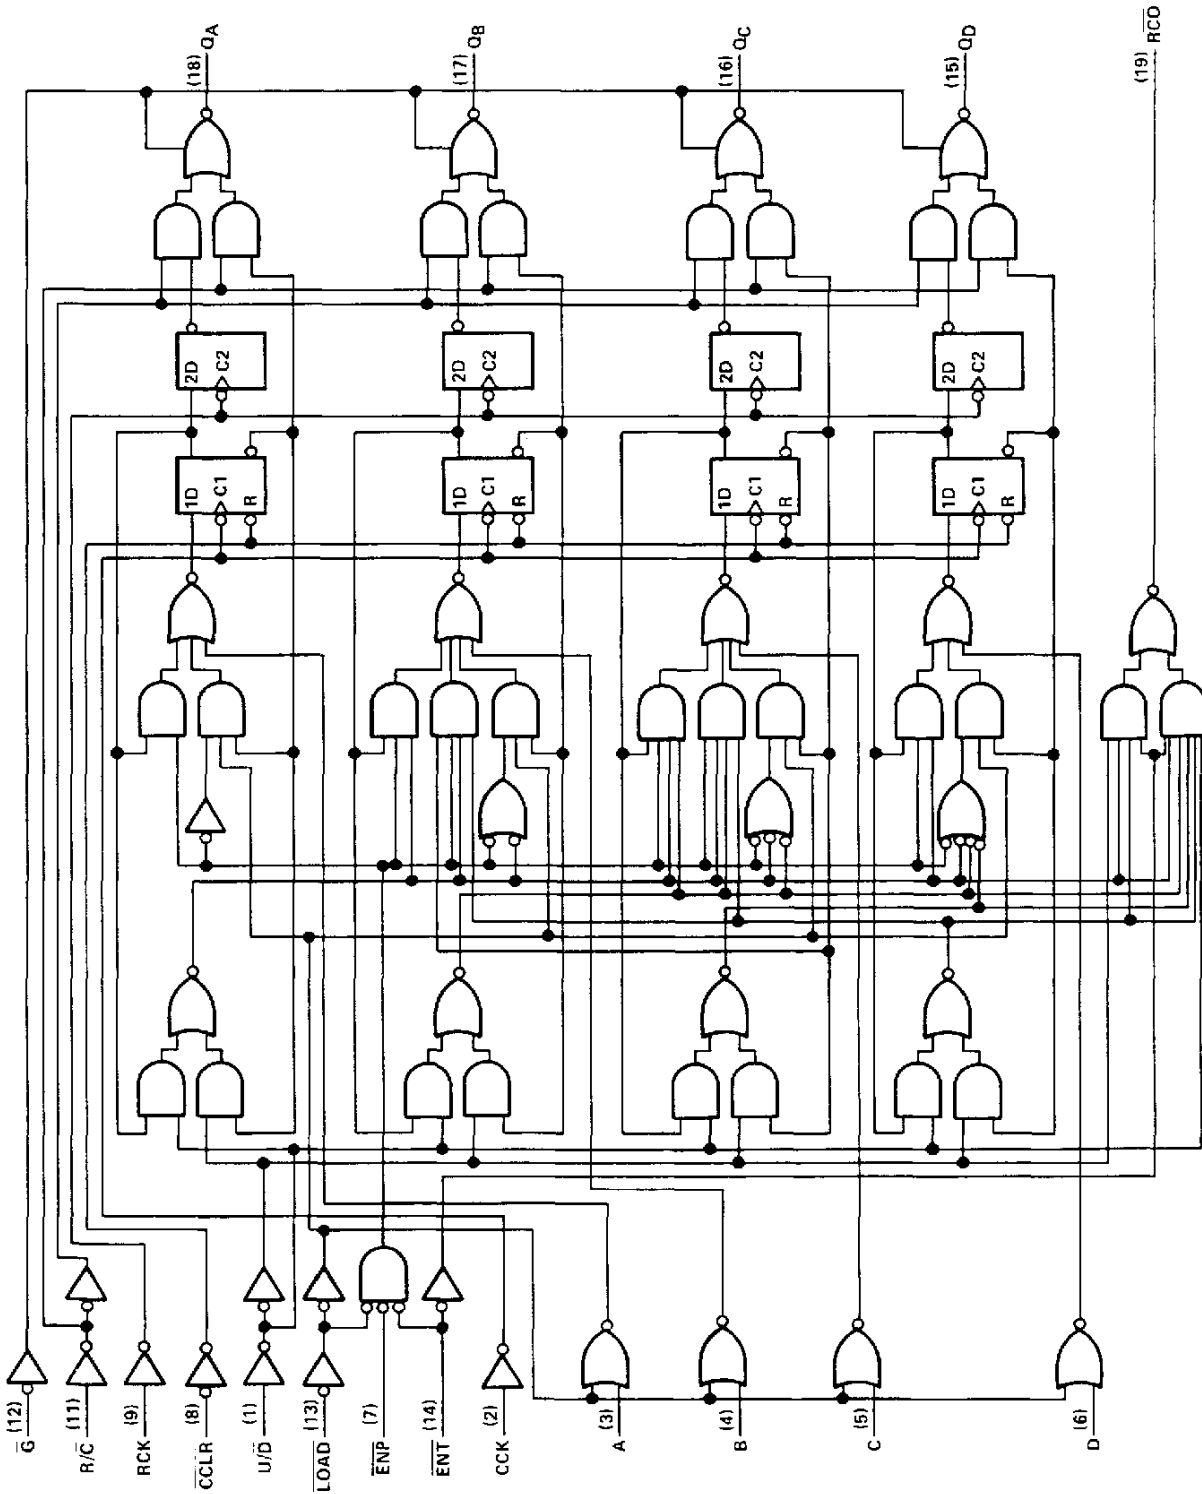


**TEXAS**  
**INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265


**SN54LS697, SN74LS697**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

logic diagrams (positive logic) (continued)

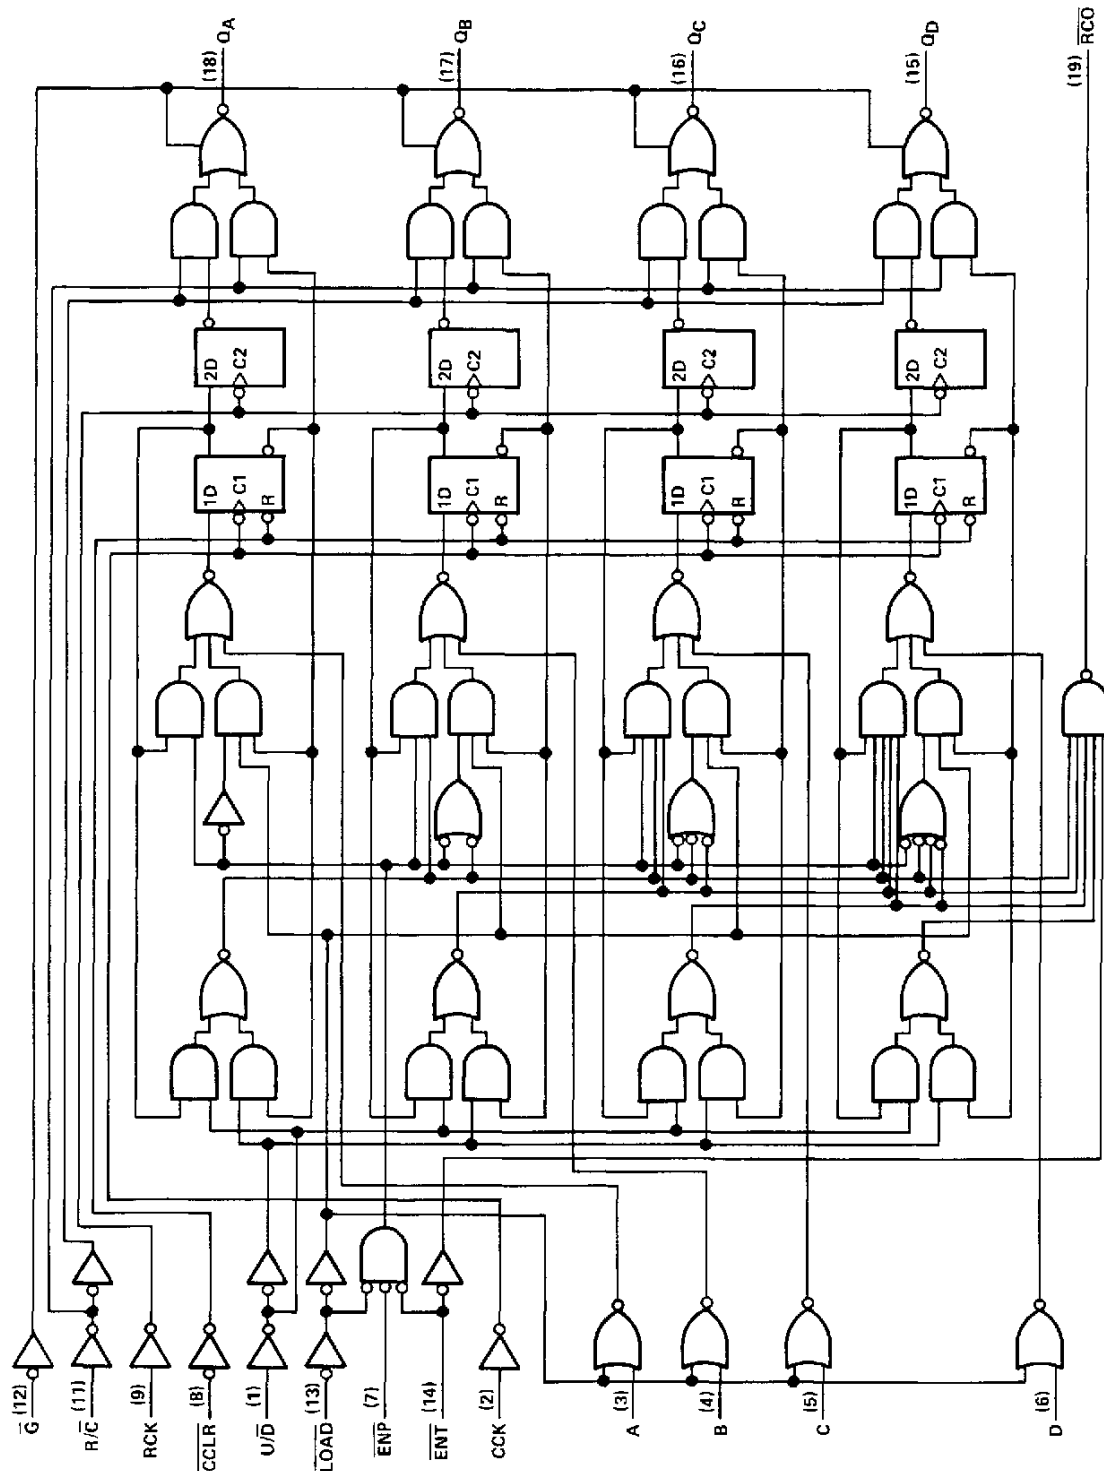


**SN54LS698, SN74LS698**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

logic diagrams (positive logic) (continued)

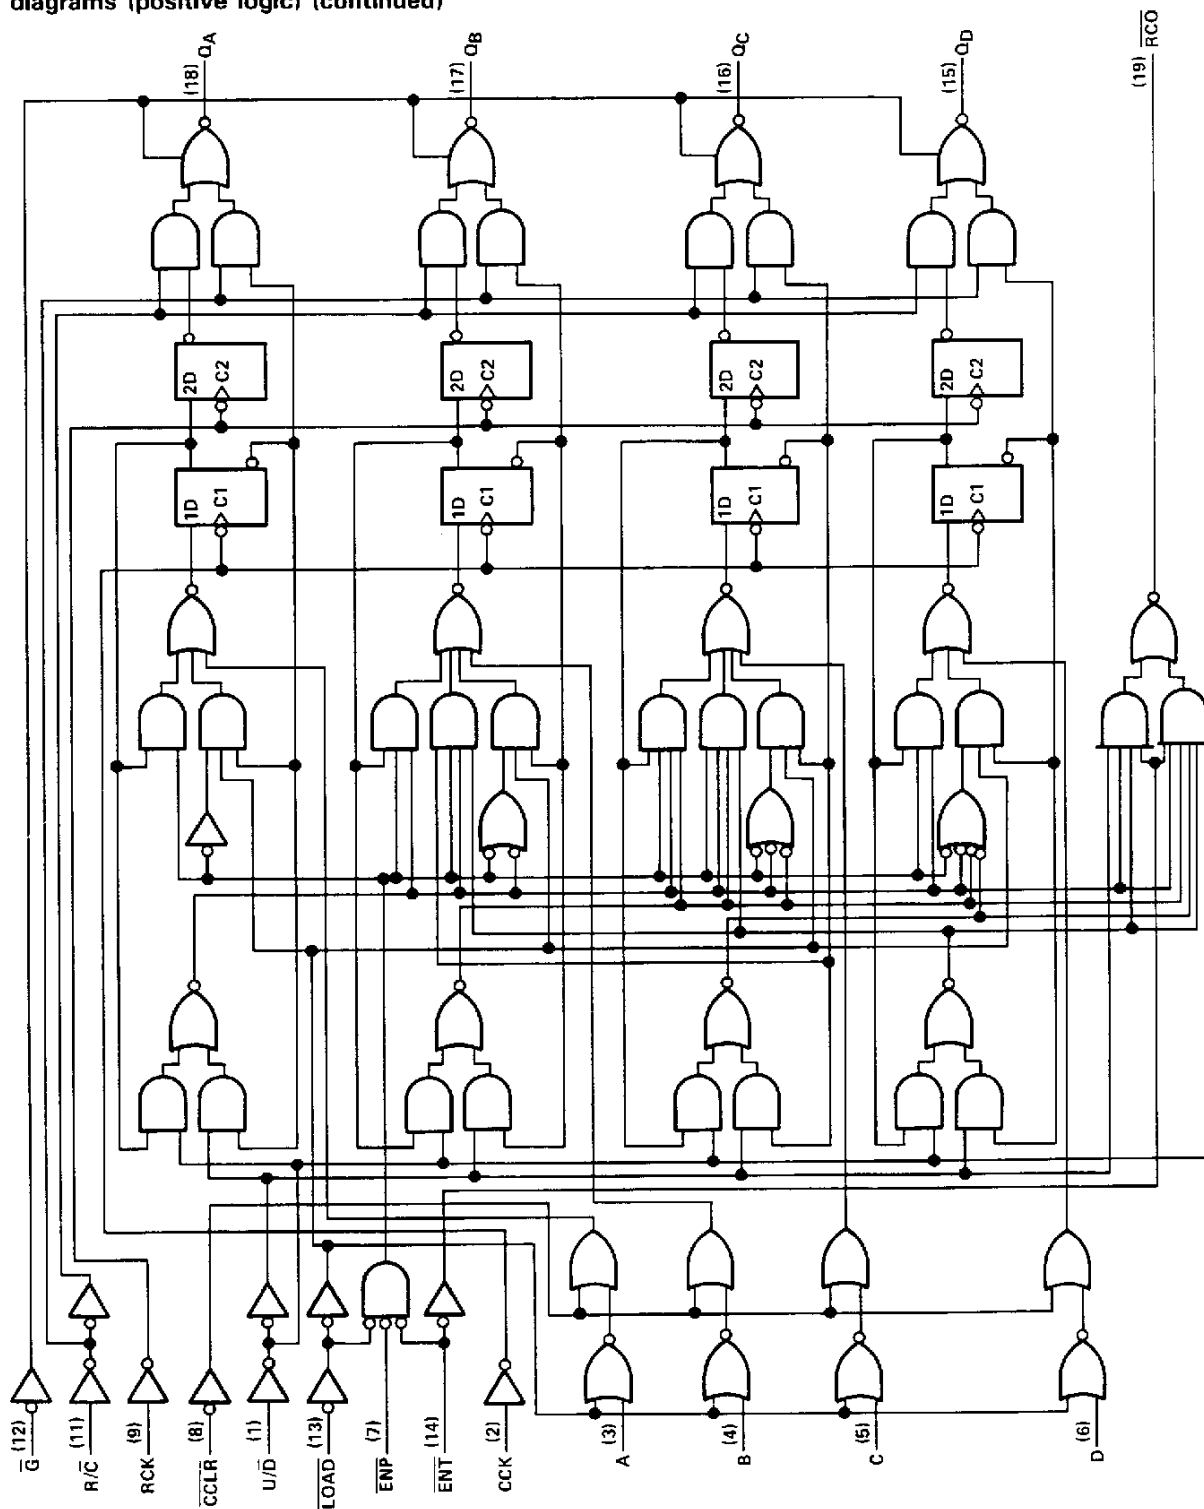

**SN54LS699, SN74LS699**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

logic diagrams (positive logic) (continued)

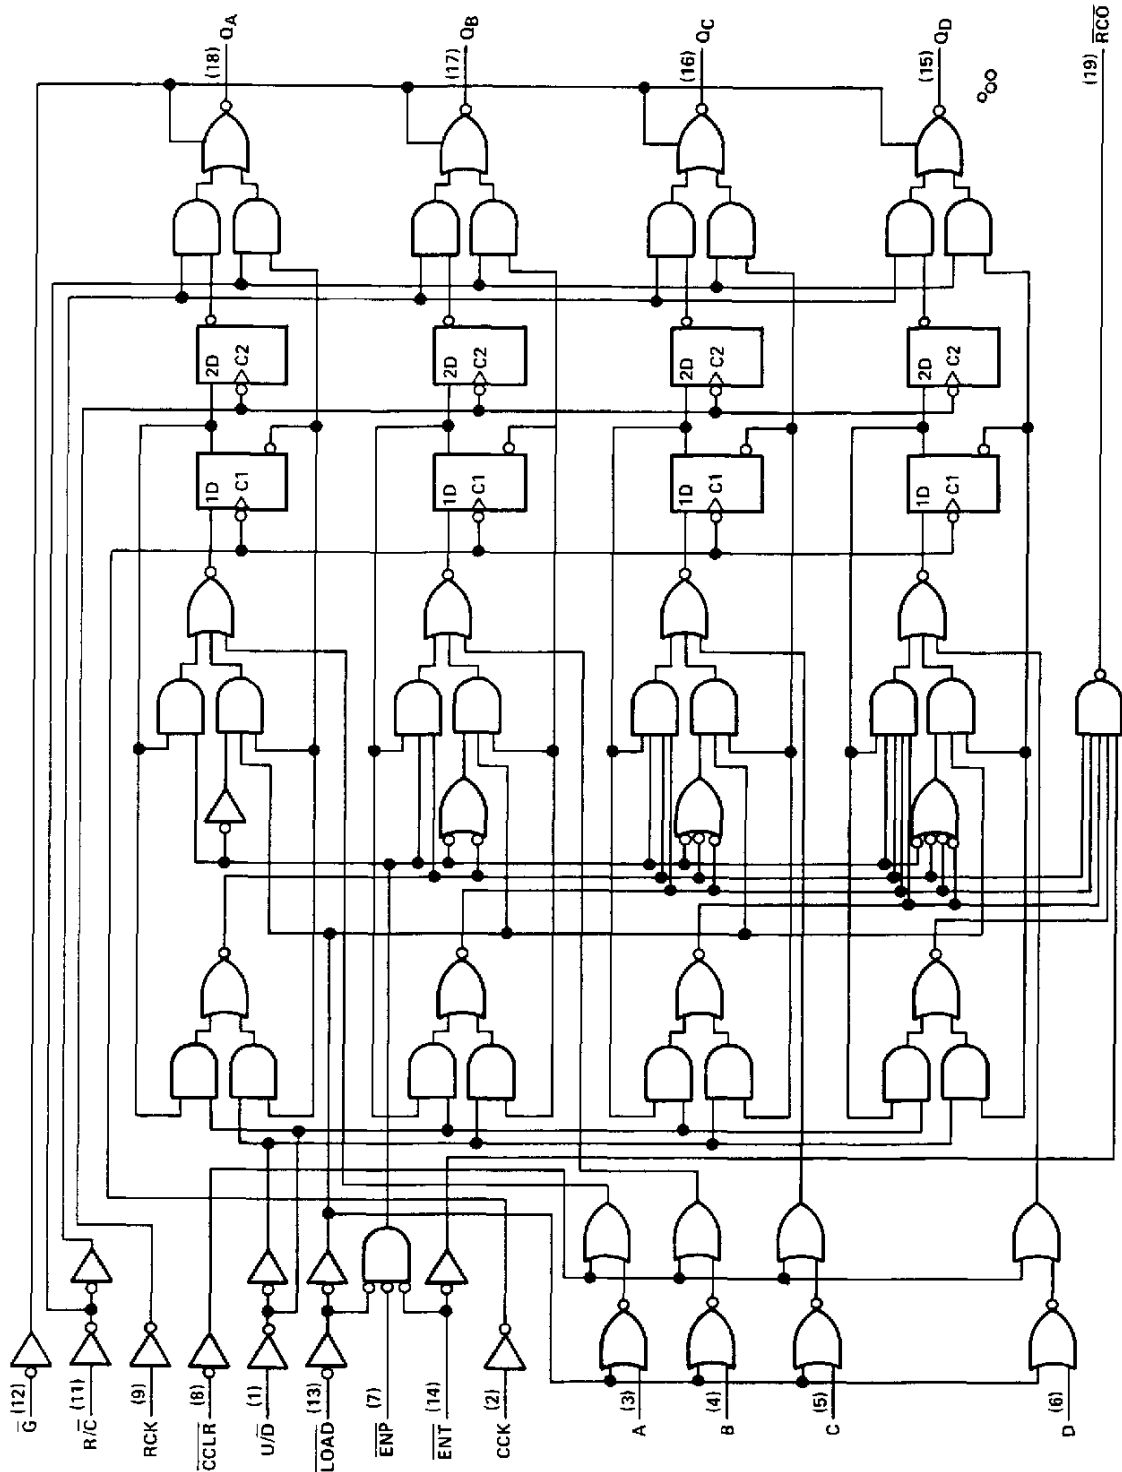

**SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

Supply voltage, $V_{CC}$ (see Note 1)	7 V
Input voltage	7 V
Off-state output voltage	5.5 V
Operating free-air temperature range: SN54LS696, SN54LS697, SN54LS699	-55°C to 125°C
SN74LS696, SN74LS697, SN74LS699	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminals.

**recommended operating conditions**

		SN54LS'			SN74LS'			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
$I_{OH}$	High-level output current	Q		-1	-2.6			mA
		$\overline{RCO}$		-0.4	-0.4			
$I_{OL}$	Low-level output current	Q		12	24			mA
		$\overline{RCO}$		4	8			
$f_{clock}$	Clock frequency	CCK		0	20			MHz
		RCK		0	20			
$t_w$	Pulse duration	CCK high or low		25	25			ns
		RCK high or low		25	25			
		'LS696, 'LS697 $\overline{CCLR}$ low		20	20			
$t_{su}$	Setup time before CCK $\uparrow$	A thru D		30	30			ns
		$\overline{ENP}$ or $\overline{ENT}$		30	30			
		LOAD		30	30			
		U/ $\overline{D}$		35	35			
		'LS696, 'LS697, $\overline{CCLR}$ inactive		25	25			
		'LS699, $\overline{CCLR}$		30	30			
$t_{su}$	Setup time CCK $\uparrow$ before RCK $\uparrow$ (see Note 2)	30			30			ns
$t_h$	Hold time	0			0			ns
$T_A$	Operating free-air temperature	-55		125	0		70	°C

NOTE 2: This set up time ensures the register will see stable data from the counter outputs. The clocks may be tied together in which case the register state will be one clock pulse behind the counter.

**SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS'			SN74LS'			UNIT
				MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V <sub>IH</sub>	High-level input voltage			2			2			V
V <sub>IL</sub>	Low-level input voltage			0.7			0.8			V
V <sub>IK</sub>	Input clamp voltage	V <sub>CC</sub> =MIN, I <sub>I</sub> =-18 mA		-1.5			-1.5			V
V <sub>OH</sub>	High-level output voltage	Any Q	V <sub>CC</sub> =MIN, V <sub>IH</sub> =2 V, V <sub>IL</sub> =V <sub>IL</sub> max	I <sub>OH</sub> =-1 mA	2.4	3.1				V
		I <sub>OH</sub> =-2.6 mA					2.4	3.1		
		I <sub>OH</sub> =-400 μA		2.5	3.2	2.7 3.2				
V <sub>OL</sub>	Low-level output voltage	Any Q	V <sub>CC</sub> =MIN, V <sub>IH</sub> =2 V, V <sub>IL</sub> =V <sub>IL</sub> max	I <sub>OL</sub> =12 mA	0.25 0.4		0.25 0.4		V	
		Any Q		I <sub>OL</sub> =24 mA			0.35 0.5			
		RCO		I <sub>OL</sub> =4 mA	0.25 0.4		0.25 0.4			
		RCO		I <sub>OL</sub> =8 mA			0.35 0.5			
		RCO								
I <sub>OZH</sub>	Off-state output current, high-level voltage applied	Any Q	V <sub>CC</sub> =MAX, $\overline{G}$ at 2 V, V <sub>O</sub> =2.7 V	20			20			μA
I <sub>OZL</sub>	Off-state output current, low-level voltage applied	Any Q	V <sub>CC</sub> =MAX, $\overline{G}$ at 2 V, V <sub>O</sub> =0.4 V	-20			-20			μA
I <sub>I</sub>	Input current at maximum input voltage	V <sub>CC</sub> =MAX, V <sub>I</sub> =7 V		0.1			0.1			mA
I <sub>IH</sub>	High-level input current	V <sub>CC</sub> =MAX, V <sub>I</sub> =2.7 V		20			20			μA
I <sub>IL</sub>	Low-level input current	A thru D	V <sub>CC</sub> =MAX, V <sub>I</sub> =0.4 V	-0.4			-0.4			mA
		All others		-0.2			-0.2			
I <sub>OS</sub>	Short-circuit output current§	Any Q	V <sub>CC</sub> =MAX, V <sub>O</sub> =0 V	-30 -130			-30 -130			mA
		RCO		-20 -100			-20 -100			
I <sub>CCH</sub>	Supply current, outputs high	V <sub>CC</sub> =MAX, See Note 3		46 65			46 65			mA
I <sub>CCL</sub>	Supply current, outputs low	All outputs open See Note 4		48 70			48 70			
I <sub>CCZ</sub>	Supply current, outputs off	See Note 5		48 70			48 70			

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Only one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

NOTES: 3. I<sub>CCH</sub> is measured after two 4.5 V to 0 V to 4.5 V pulses have been applied to CCK and RCK while  $\bar{G}$  is grounded and all other inputs are at 4.5 V.

4. I<sub>CCL</sub> is measured after two 0 V to 4.5 V to 0 V pulses have been applied to CCK and RCK while all other inputs are grounded.

5. I<sub>CCZ</sub> is measured after two 0 V to 4.5 V to 0 V pulses have been applied to CCK and RCK while  $\bar{G}$  is at 4.5 V and all other inputs are grounded.

switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see note 6)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS696, 'LS697		'LS699		UNIT
				MIN	TYP MAX	MIN	TYP MAX	
t <sub>PLH</sub>	CCK↑	$\overline{RCO}$	R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 15 pF	23	40	23	40	ns
t <sub>PHL</sub>				23	40	23	40	ns
t <sub>PLH</sub>	$\overline{ENT}$	$\overline{RCO}$		13	20	13	20	ns
t <sub>PHL</sub>				13	20	13	20	ns
t <sub>PLH</sub>	CCK↑	Q	R <sub>L</sub> = 667 Ω, C <sub>L</sub> = 45 pF	12	20	12	20	ns
t <sub>PHL</sub>				17	25	17	25	ns
t <sub>PLH</sub>	RCK↑	Q		12	20	12	20	ns
t <sub>PHL</sub>				17	25	17	25	ns
t <sub>PHL</sub>	$\overline{CCLR}$ ↓	Q		23	40			ns
t <sub>PLH</sub>	R/ $\overline{C}$	Q		16	25	16	25	ns
t <sub>PHL</sub>				16	25	16	25	ns
t <sub>PZH</sub>	$\overline{G}$ ↓	Q		19	30	19	30	ns
t <sub>PZL</sub>			19	30	19	30	ns	
t <sub>PHZ</sub>	$\overline{G}$ ↑	Q	R <sub>L</sub> = 667 Ω, C <sub>L</sub> = 5 pF	17	30	17	30	ns
t <sub>PLZ</sub>				17	30	17	30	ns

NOTE 6: Load circuits and voltage waveforms are shown in Section 1.




POST OFFICE BOX 655012 • DALLAS, TEXAS 75265



SN54LS696, SN74LS696  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

typical operating sequences


'LS696 DECADE COUNTER, Asynchronous Clear

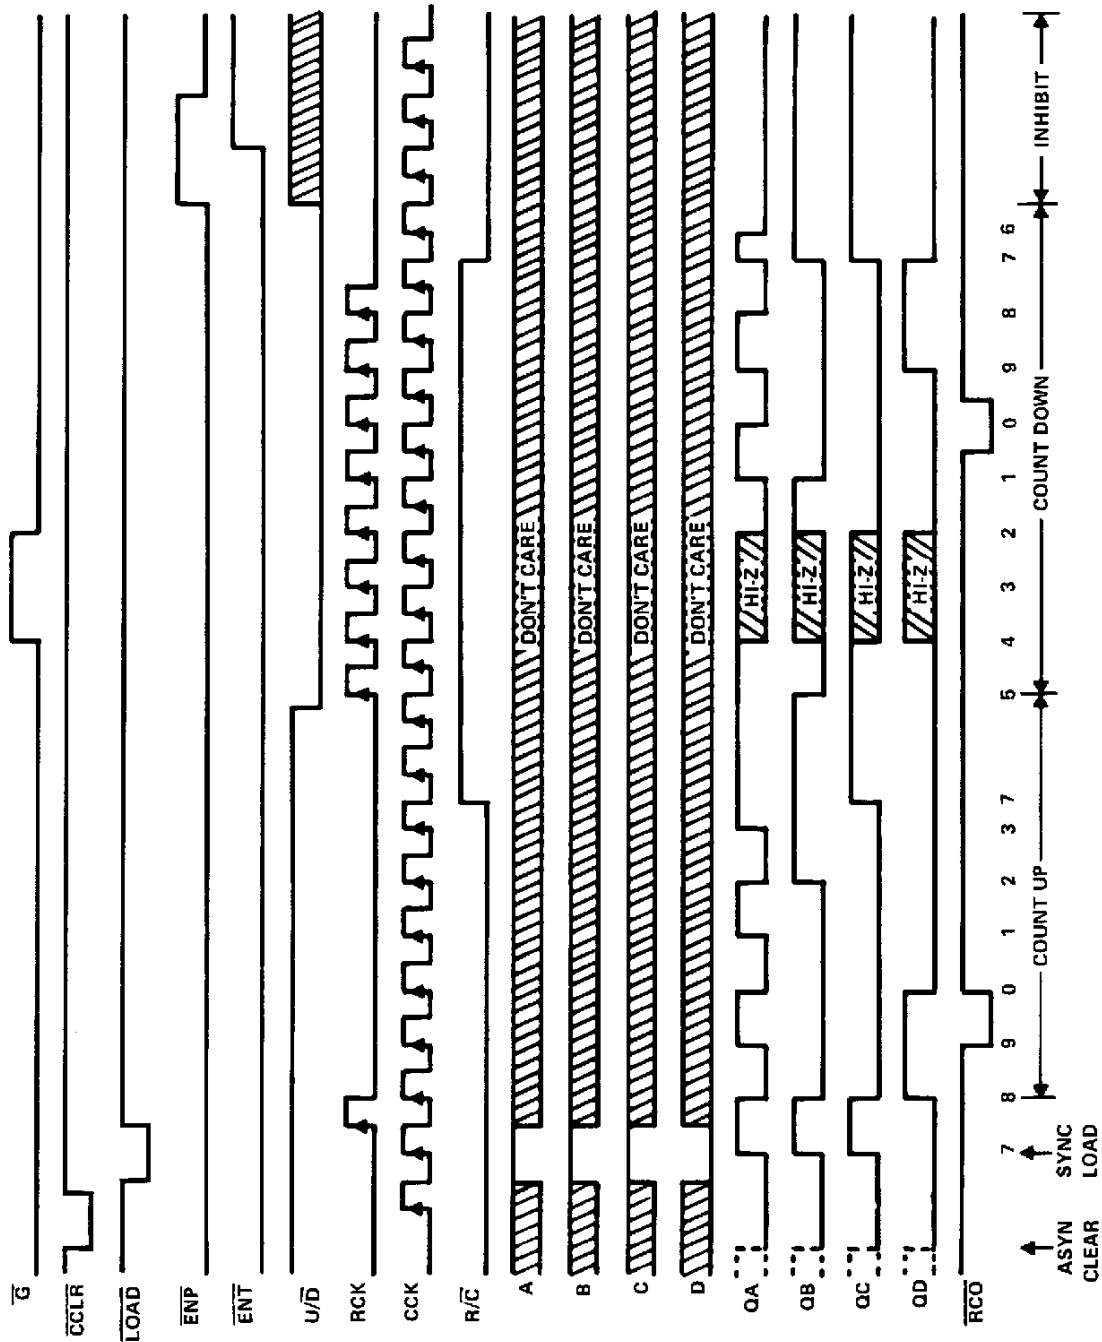

**SN54LS697, SN54LS699, SN74LS697, SN74LS699**  
**SYNCHRONOUS UP/DOWN COUNTERS**  
**WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS**

typical operating sequences (continued)

'LS697 BINARY COUNTER, Asynchronous Clear  
 'LS699 BINARY COUNTER, Synchronous Clear

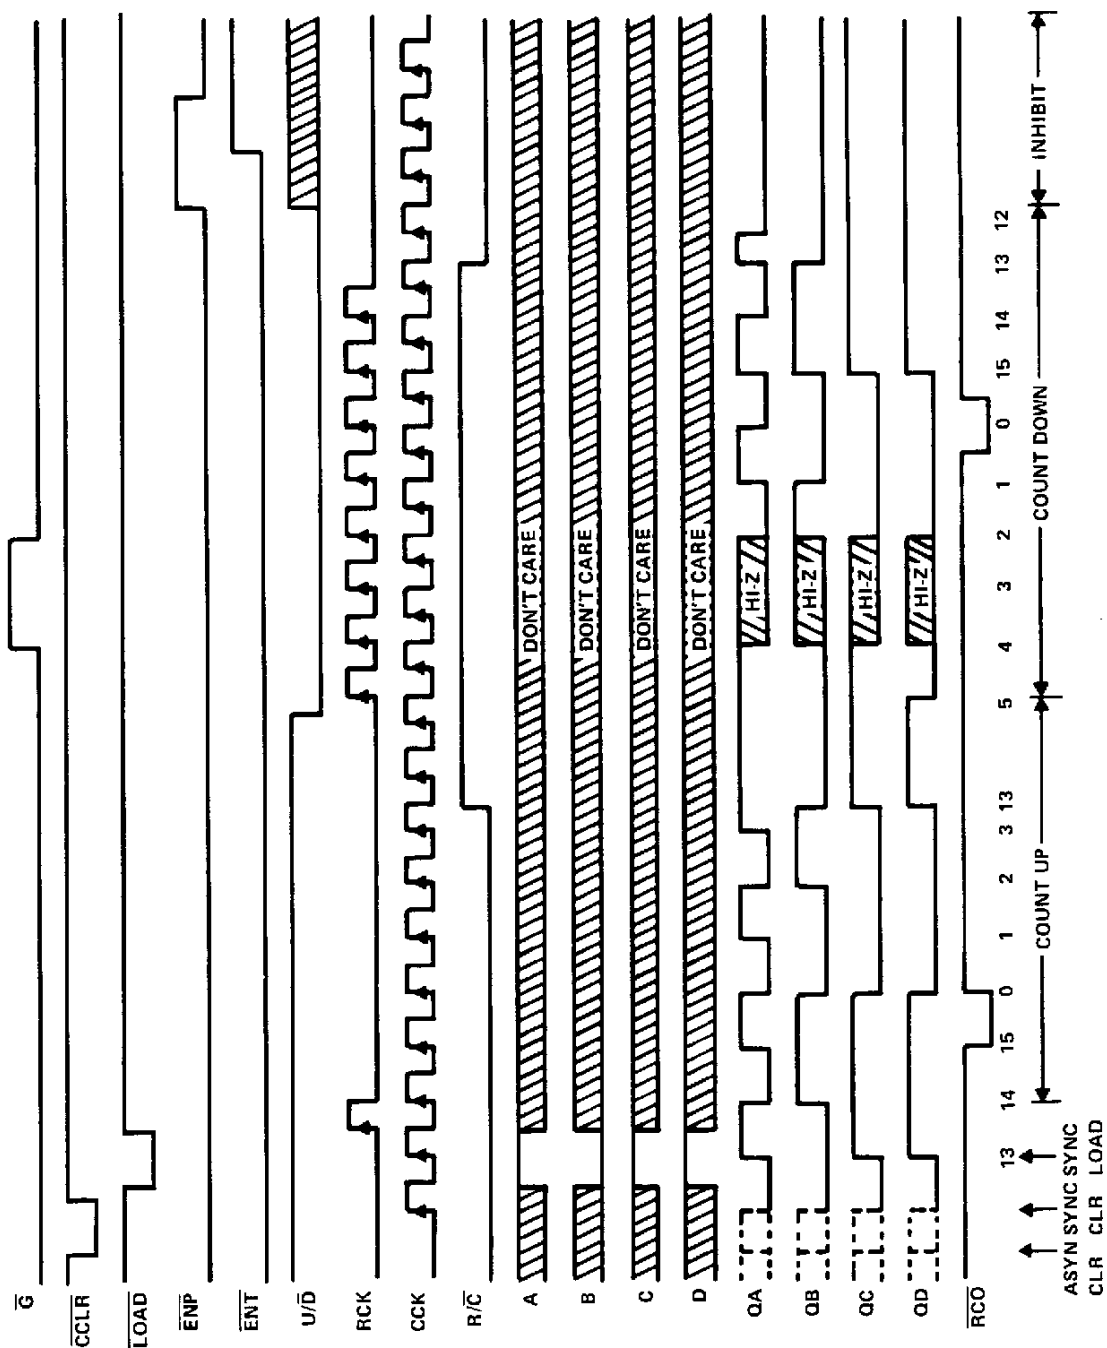

## **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

**TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.**

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.