




LID SIDE

NON LID SIDE

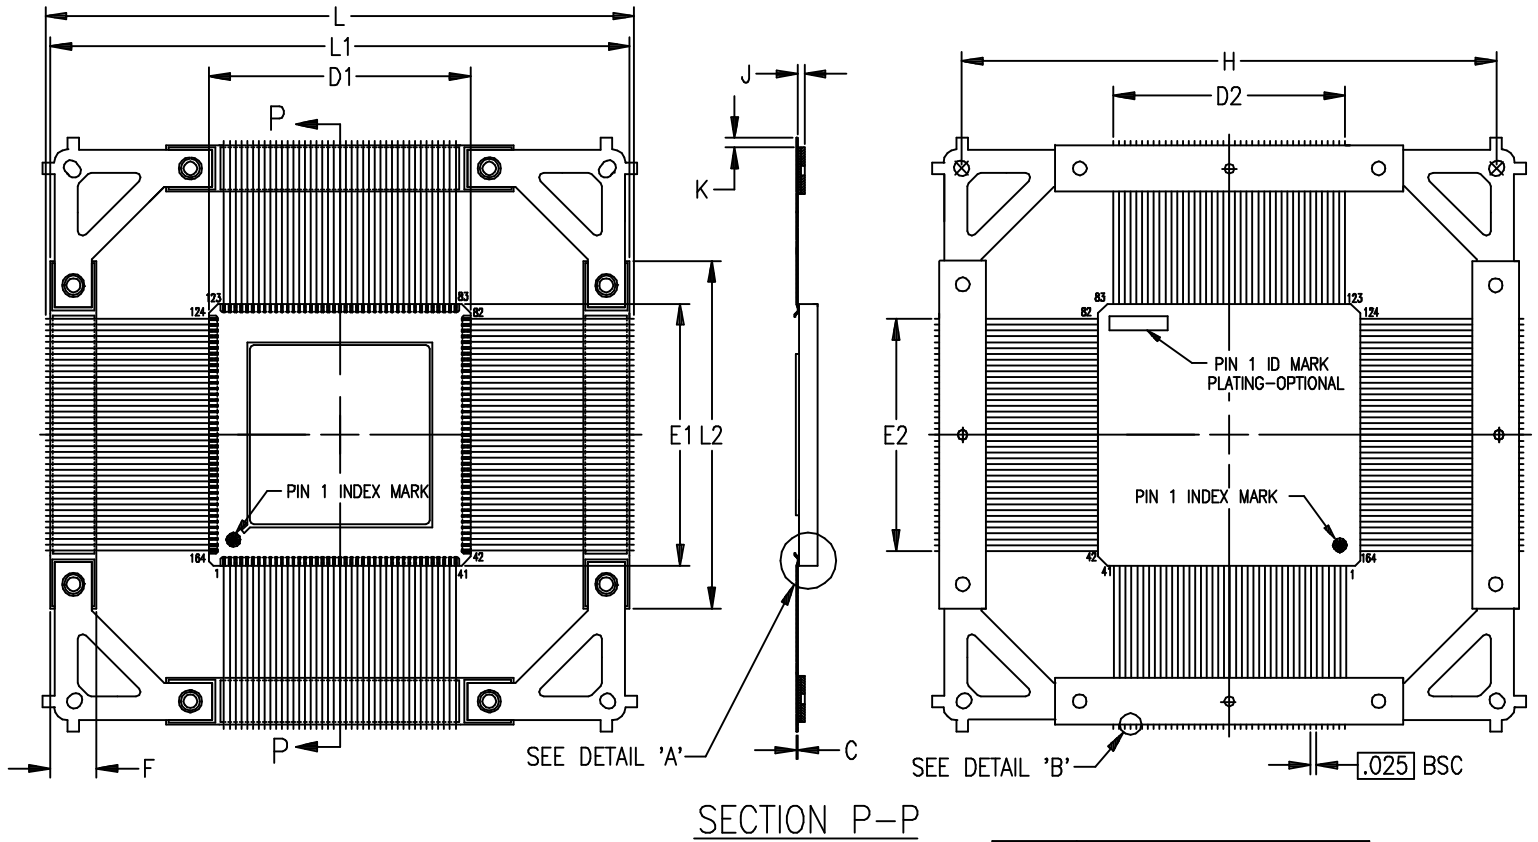

DETAIL 'A'



DETAIL 'B'

## NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982
2. SYMBOL "N" IS THE NUMBER OF TERMINALS.
3. PACKAGES ARE SHIPPED UNFORMED.
4. LEAD FINISH: GOLD (50 MICROINCHES MINIMUM) OVER NICKEL PER MIL-I-38535

SYMBOL	INCHES		
	MIN.	NOM.	MAX.
A	$\times$	$\times$	.130
A1	$\times$	$\times$	.110
A2	$\times$	$\times$	.020
B	.007	$\times$	.012
C	.005	.006	.009
D1/E1	1.120	1.130	1.145
D2/E2	1.000 BSC		
F	.175	.200	.225
H	2.300 BSC		
J	.030	.035	.040
K	$\times$	$\times$	.020
L	$\times$	$\times$	2.580
L1	2.485	2.500	2.505
L2	1.480	1.500	1.520
N	164		

164-PIN CERAMIC BRAZED CQFP (CB164)  
(XC4000 VERSION)